
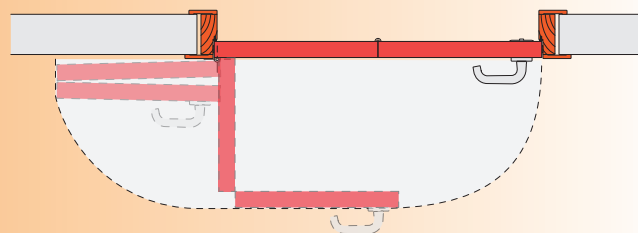


COMPACK ^{180°} LIVING

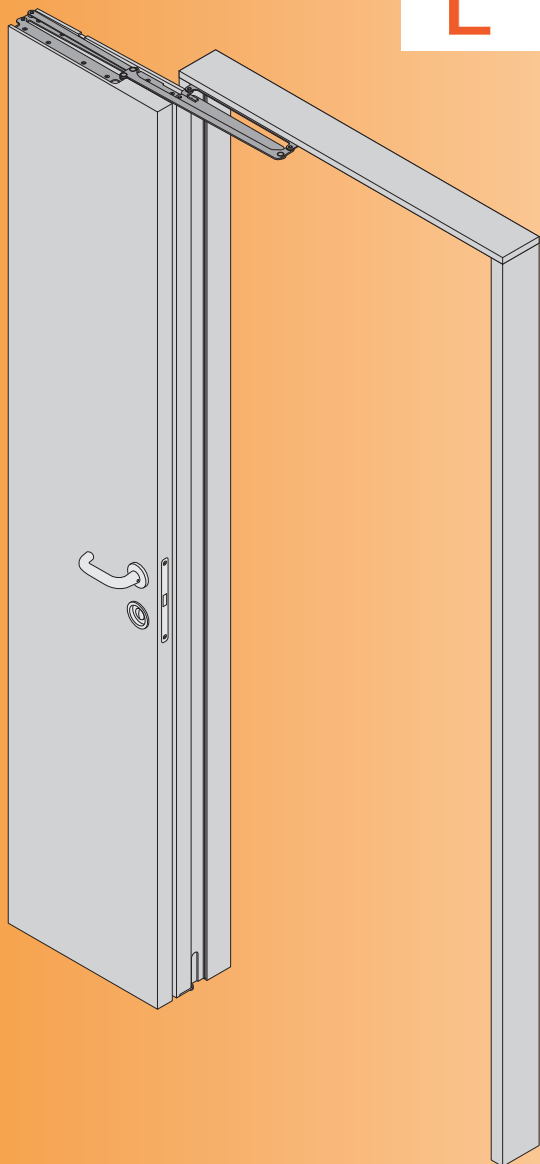

TECHNICAL CONSTRUCTION MANUAL COMPACK LIVING 180° system

CELEGON S.r.l. - Via G. Galilei, 6 - 30035 Mirano (Venezia) - T +39 (0)41 5728404 - F +39 (0)41 5728522
www.celegon.it - info@celegon.it

CONTENTS

1. INTRODUCTION	3
2. COMPATIBILITY OF THE COMPACT LIVING SYSTEM	4
3. USE VARIANTS.....	5
3.1 Hardware	6
3.2 Upper crossbeam machining.....	7
3.3 Vertical section without rabbet profile.....	8
3.4 Vertical section with rabbet profile	9
3.5 Horizontal section left door	10
3.6 Dimensional diagram of the door - symmetric leaves (Version 1).....	11
3.7 Dimensional diagram of the door - asymmetric leaves (Version 2)	12
3.8 Dimensional diagram of the door - asymmetric leaves (Version 3)	13
4. DIMENSIONAL SUMMARIES	14
4.1 Single opening door	14
4.2 Dimensional diagram of the double opening door.....	15
4.3 COMPACT LIVING 180° - 90° combination possibilities on double doors	16
4.4 Double opening door	17
4.5 Dimensional drawing for a 3-leaf single door	18
4.6 Dimensional drawing for a 3-leaf double door	22
5. COMPONENTS	23
5.1 Wood components without rabbet profile compatible with COMPACT LIVING 90°	23
5.2 Wood components with rabbet profile compatible with COMPACT LIVING 90°	24
5.3 Door leaf hinge side (compatible with COMPACT LIVING 90°)	25
5.4 Door leaf handle side (compatible with COMPACT LIVING 90°)	26
5.5 Workings for accessories (compatible with COMPACT LIVING 90°)	27
5.6 Door hardware mounting hole diagrams (compatible with COMPACT LIVING 90°)	28
5.7 Hinge side door jamb (compatible with COMPACT LIVING 90°)	29
5.8 Handle side door jamb (compatible with COMPACT LIVING 90°).....	30
5.9 Upper crossbeam without rabbet profile (compatible with COMPACT LIVING 90°)	31
5.10 Upper crossbeam with rabbet profile (compatible with COMPACT LIVING 90°).....	32
5.11 Working for the silicone gasket (compatible with COMPACT LIVING 90°)	33
6. ASSEMBLY	34
6.1 Assembling the hardware on the leaf.....	34
6.2 Assembling the hardware on the jamb	35
6.3 Installation door leaf on the jambs.....	36
7. SPECIAL COMPACT LIVING MAGNETIC LATCH.....	37
7.1 Examples for using the special COMPACT LIVING lock.....	38

The company reserved the right to make, at any time, without prior notice, all technical changes it considers appropriate to improve the quality and the correct functionality of the products.

All contents of this manual are covered by copyright.

It's forbidden even partial reproduction of text and drawings, without prior written permission of Celegon s.r.l.. Any abuse will be prosecuted according to law.

All right reserved - Duplication or divulgation without authorization is strictly forbidden.

1. INTRODUCTION

The **COMPACK LIVING 180°** system opens up new possibilities in interior design. Thanks to its reduced space requirements, silent operation and acoustic insulation properties, **COMPACK LIVING 180°** offers an alternative to traditional swing doors, doors that slide into or along the wall, accordion doors, and rototranslating doors. **COMPACK LIVING 180°** is also used in movable walls, closets and wardrobes.

The **COMPACK LIVING 180°** system, installed between the top edge of the leaf and the lintel, makes it possible to confine the movement of the door leaf to one side of the wall and thus to recover usable space.

The **COMPACK LIVING** systems are designed for extreme simplicity and speed of installation.

With **COMPACK LIVING** systems, any dimension in width and height can be managed. The combined weight limit for the two leaves is 50 kg. The maximum door leaf thickness depends on frame thickness (see paragraph 3.5).

COMPACK LIVING 180° uses either traditional door latches (for use with paired lever handles or knobs) or a special **COMPACK** magnetic latch (for a lever handle on one side and a recessed handle on the other). With the **COMPACK** latch the recessed handle can be used to operate the latch. This system provides 180° rotation (see Section 7. *SPECIAL COMPACK MAGNETIC LATCH*).

The **COMPACK LIVING** systems provide stable, silent and ergonomic door operation. Stop on three sides ensures excellent acoustic insulation when the door is closed. These systems leave maximum technical and aesthetic freedom in designing the door. Doors can be constructed in various versions to respond to the countless customer needs and to fit oversized dimensions.

COMPACK LIVING systems consist of steel plates connected one to another with steel pins and plastic bushings.

The door leaves are prepared in the same way for 90° or 180° opening. The same stock of semi-finished materials (doors leaves) and same preparatory work (milling, drilling) allow installation either of the COMPACK LIVING 90° hinge for a door opening to 90° or the COMPACK LIVING 180° hinge for a door opening to 180°.



The hardware is cleaned using a soft cloth being careful not to move the door during the cleaning process to prevent injury.

Never put your hands in among the moving arms when installing or operating the door.

Give the information sheets including in the package to the final user.




MEASUREMENT CALCULATOR



INSTALLATION VIDEO

2. COMPATIBILITY OF THE COMPACT LIVING SYSTEM

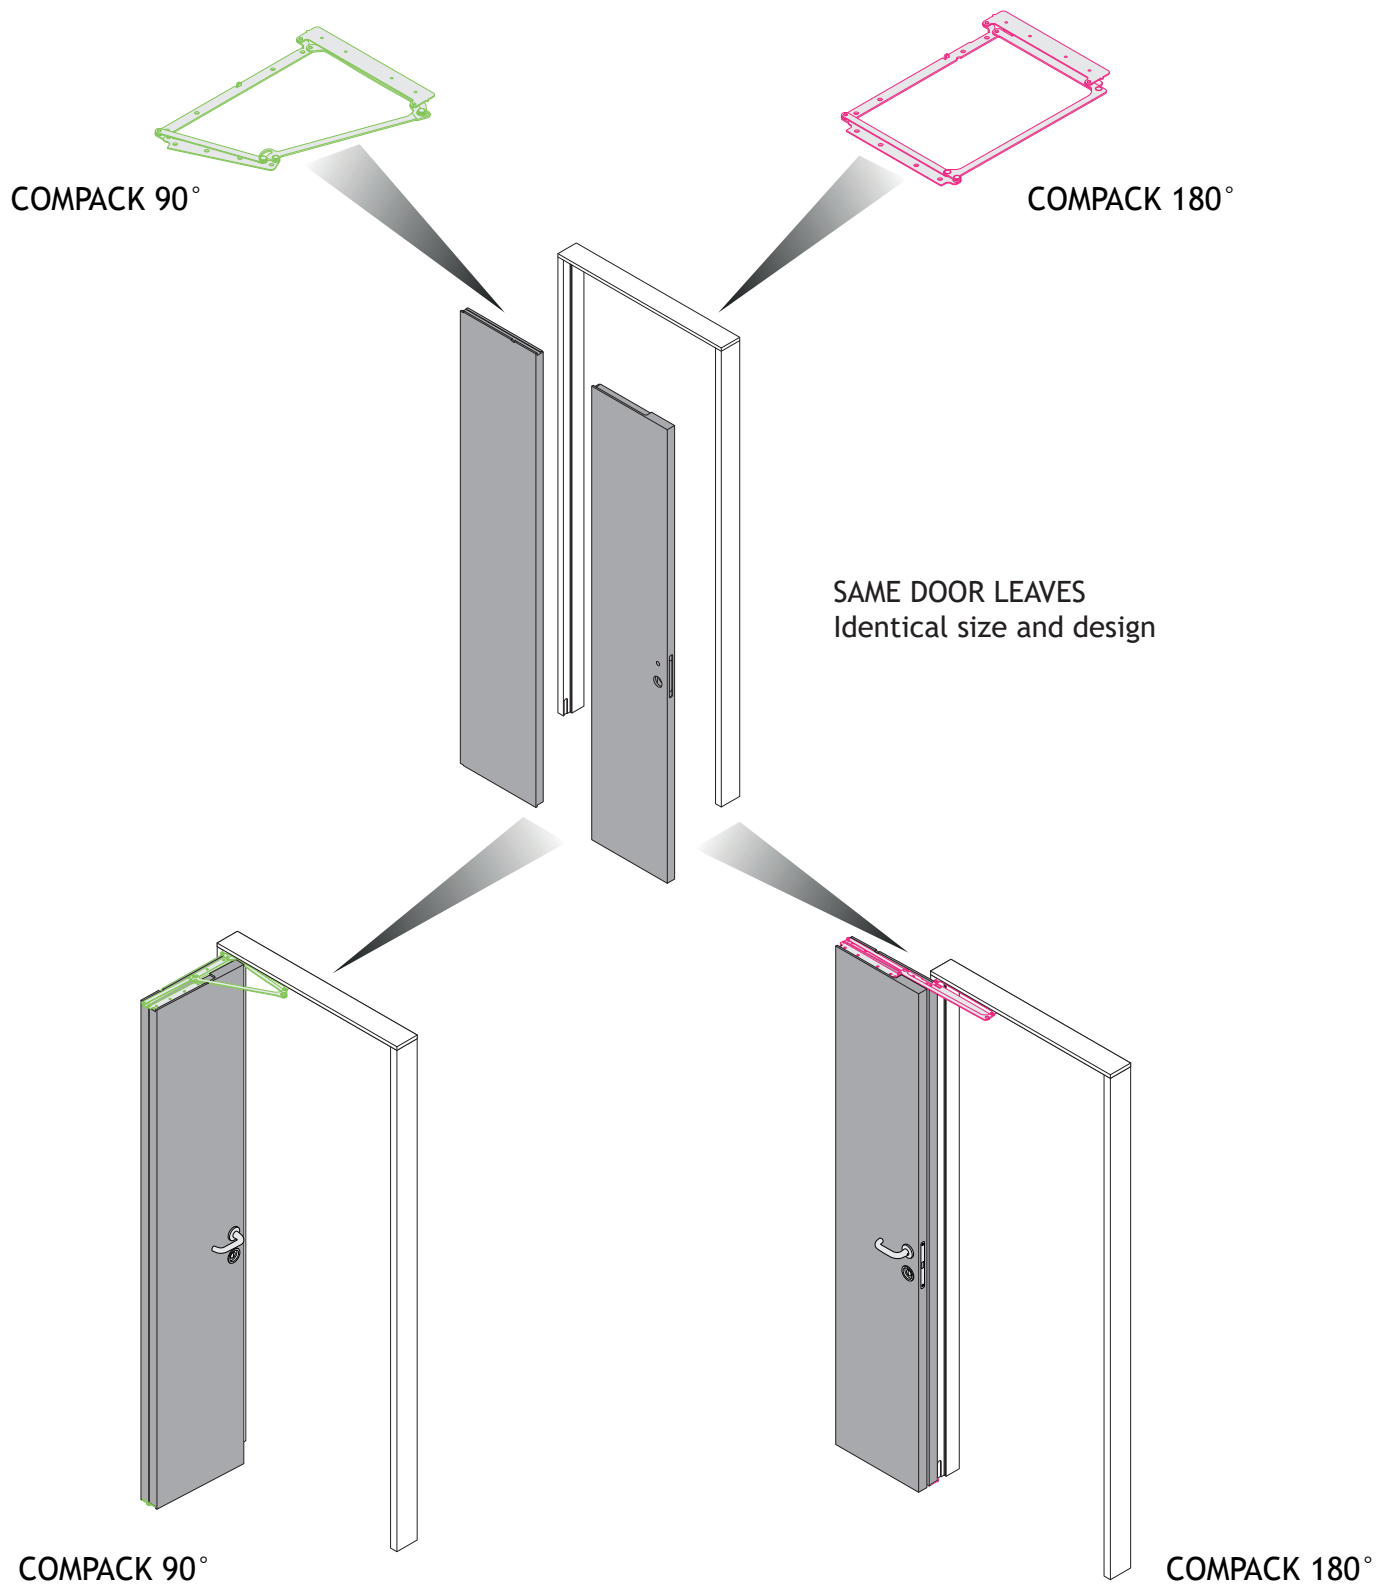


3. USE VARIANTS

To get the most out of the variants illustrated on this page, see the specifications for using the COMPACK latch (see Section 7. SPECIAL COMPACK LIVING MAGNETIC LATCH).

- **Version 1**

Symmetric door leaves


By using the handle only on one side and the recessed handle on the other, is necessary to apply the magnetic lock **COMPACK**.
Version possible with all available items RIGHT/LEFT.

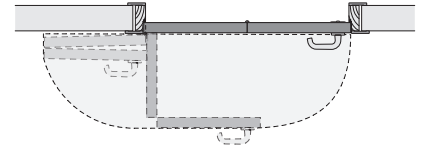

- **Version 2**

Asymmetric door leaves with handle leaf from -50 to 0 lower

By using the handle only on one side and the recessed handle on the other, is necessary to apply the magnetic lock **COMPACK**.
Version possible with all available items RIGHT/LEFT.

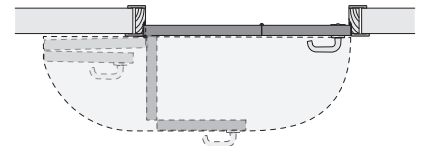


- **Version 3**

Asymmetric door leaves with handle leaf from 0 to +200 larger


By using the handle only on one side and the recessed handle on the other, is necessary to apply the magnetic lock **COMPACK**. When you decide to use a pair of handles or knobs, you can use a traditional lock.

Version possible with all available items RIGHT/LEFT.

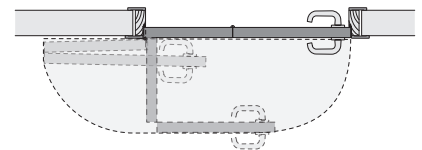


WAY OF OPENING


1 - Left opening

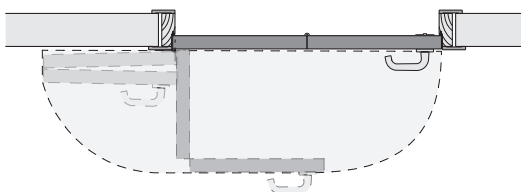

2 - Right opening

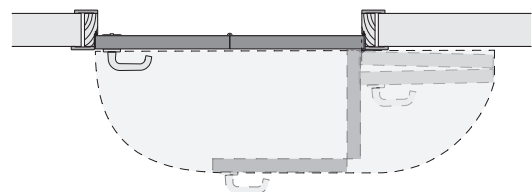

3.1 Hardware


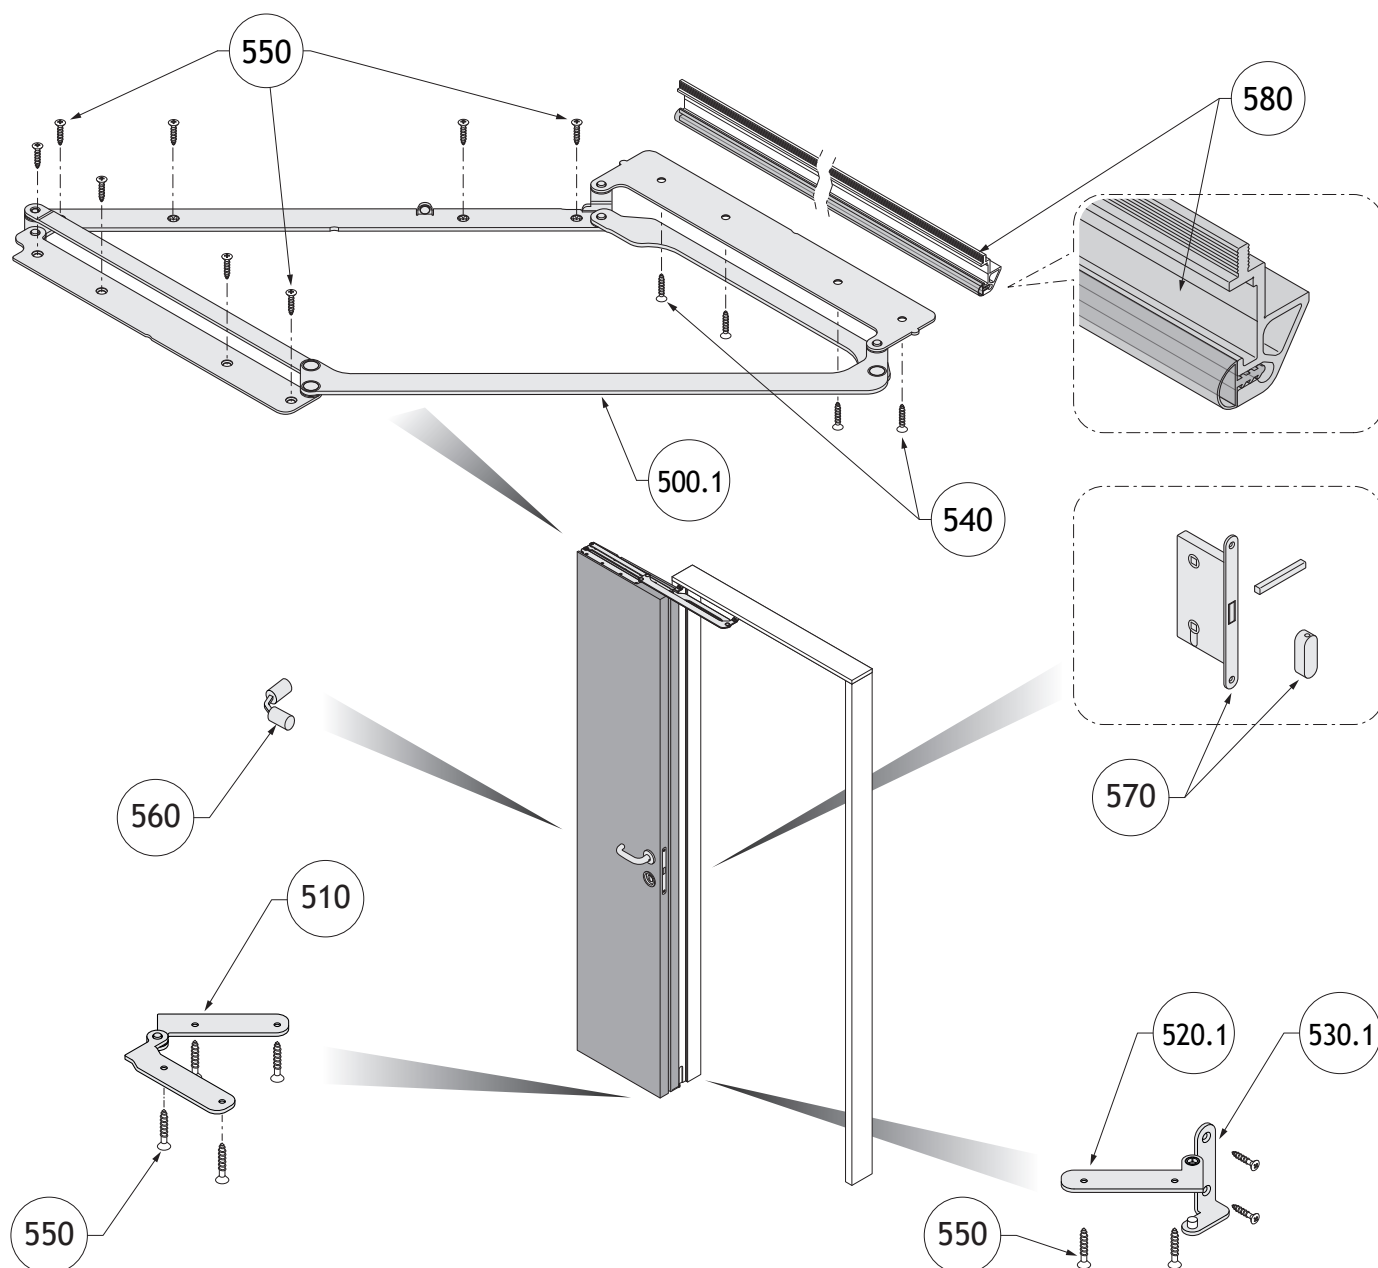


Part list		
Ref.	Q.ty	Description
500.1	1	Compack Living system RH or LH
510	1	Central hinge lower
520.1	1	Lateral hinge lower for leaf RH or LH
530.1	1	Lateral hinge lower for jamb RH or LH
540	4	Screw TSP trx ø 4x22
550	16	Screw TSP trx ø 4x30
560	1	Invisible hinge for alignment leaves
570	1	Magnetic lock Compack Living with strikers and special square spindle (optional)
580	1	Rabbet profile (optional) (gasket NOT supplied)

3.2 Upper crossbeam machining



Machining without rabbet profile

(see paragraph 5.9)

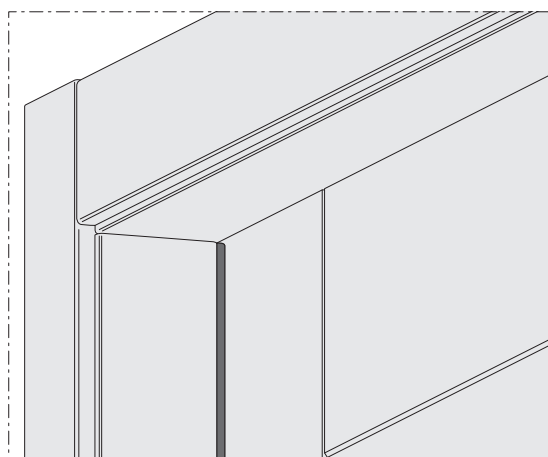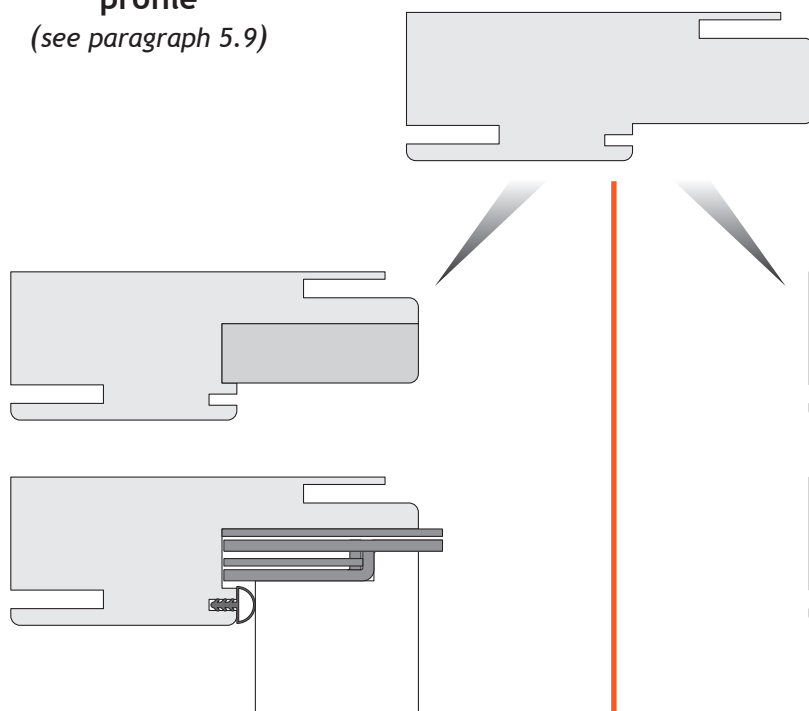

Machining for rabbet profile


(see paragraph 5.10)

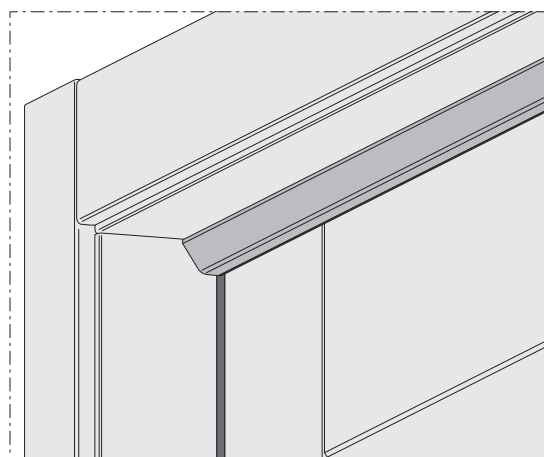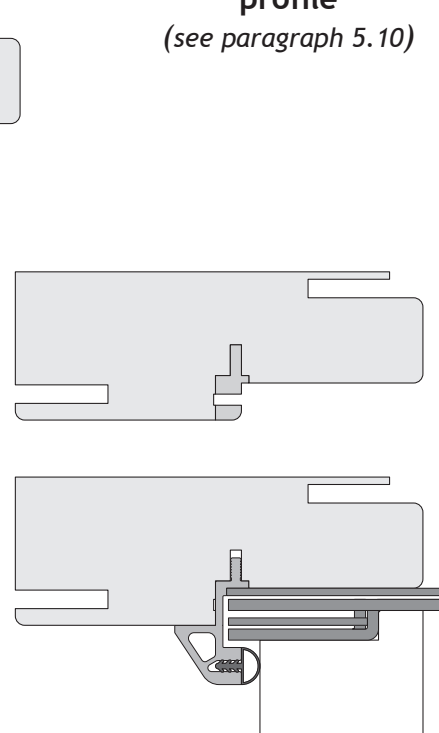

PROS	CONS
- With the door open you can hardly see the machining	- Invasive machining
- With the door closed, you can't see anything. Like in a swing door	- The finish on visible machined parts must be restored
	- The remaining part where the top plate is attached is a bit thin
	- For the same frame size, the panel is higher than a swing door

PROS	CONS
- Minimally invasive machining	- With the door open you can see the profile
- With the application of the profile, the machined parts are covered	- With the door closed you can see the profile
- With the same frame size, the panel is as high as a swing door	


3.3 Vertical section without rabbet profile

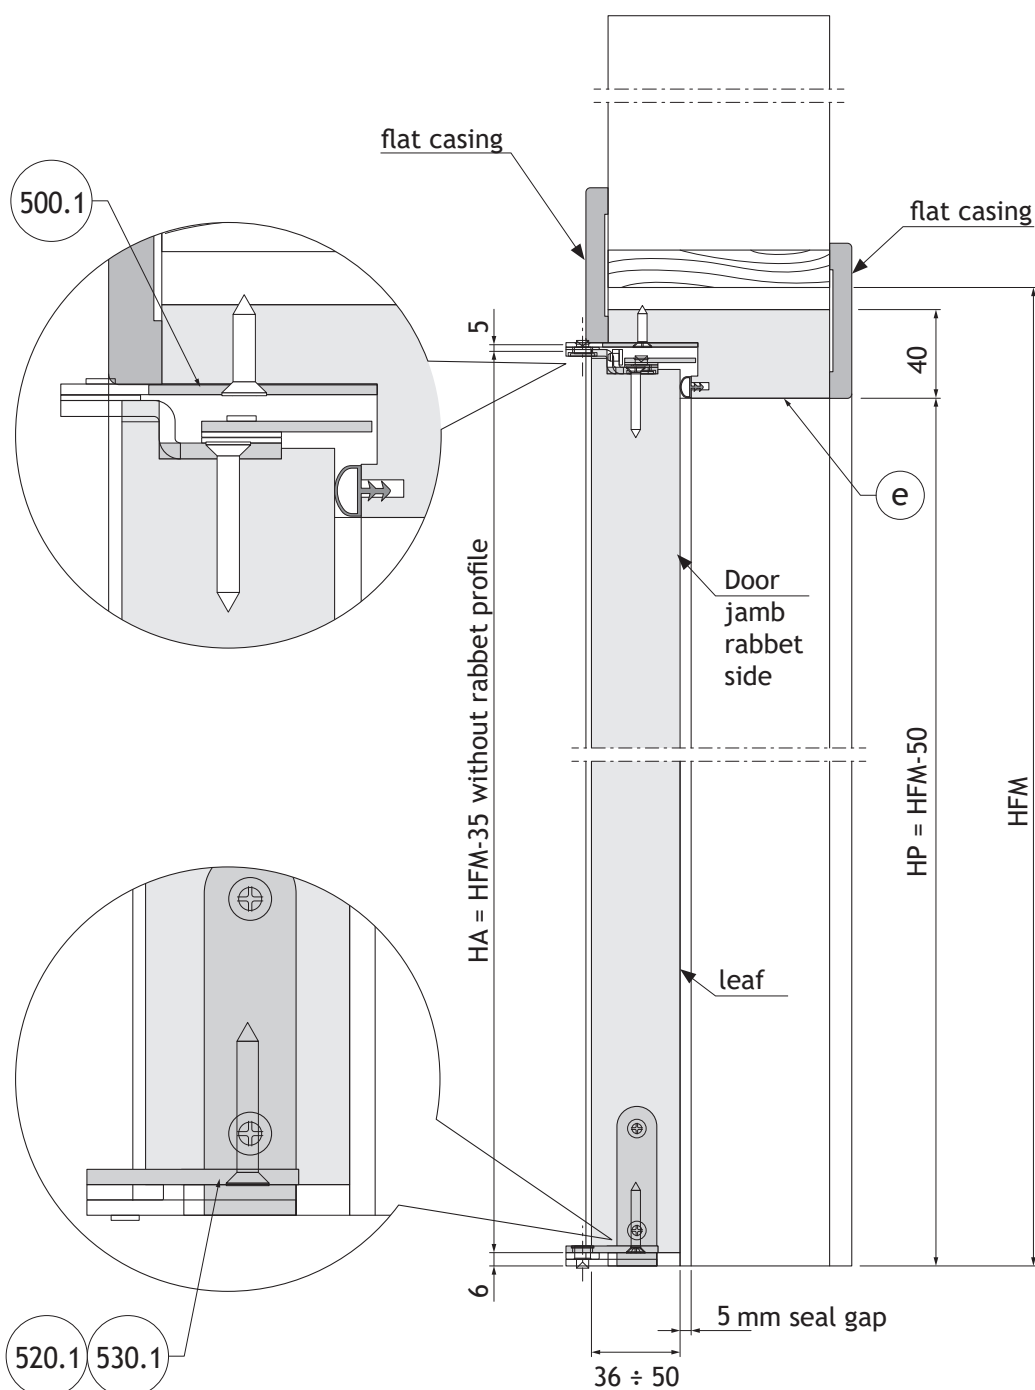

HFM = Wall Hole Height
HP = Passage Dimension
HA = Leaf Height

Part list		
Ref.	Q.ty	Description
500.1	1	Compack Living 180 system RH or LH
520.1	1	Lateral hinge lower for leaf RH or LH
530.1	1	Lateral hinge lower for jamb RH or LH
e	1	Upper crossbeam

3.4 Vertical section with rabbet profile

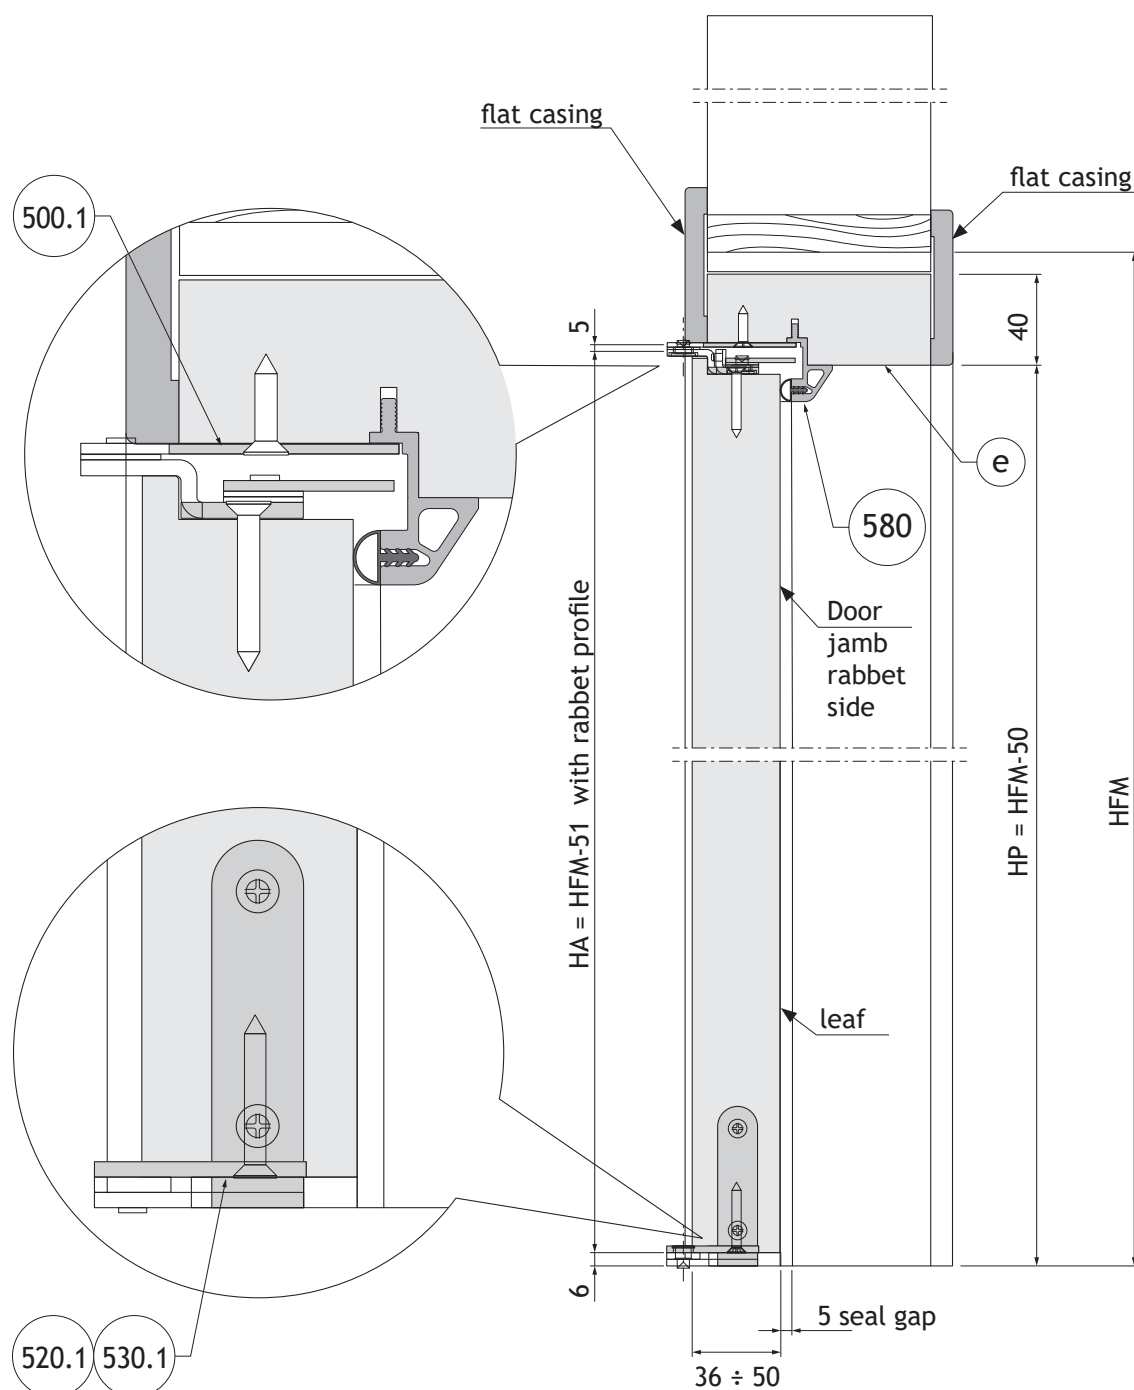


HFM = Wall Hole Height
HP = Passage Dimension
HA = Leaf Height

Part list		
Ref.	Q.ty	Description
500.1	1	Compact Living 180 system RH or LH
520.1	1	Lateral hinge lower for leaf RH or LH
530.1	1	Lateral hinge lower for jamb RH or LH
580	1	Rabbet profile (optional)
e	1	Upper crossbeam

3.5 Horizontal section left door

Example of Left Door (*Right door is symmetric*)

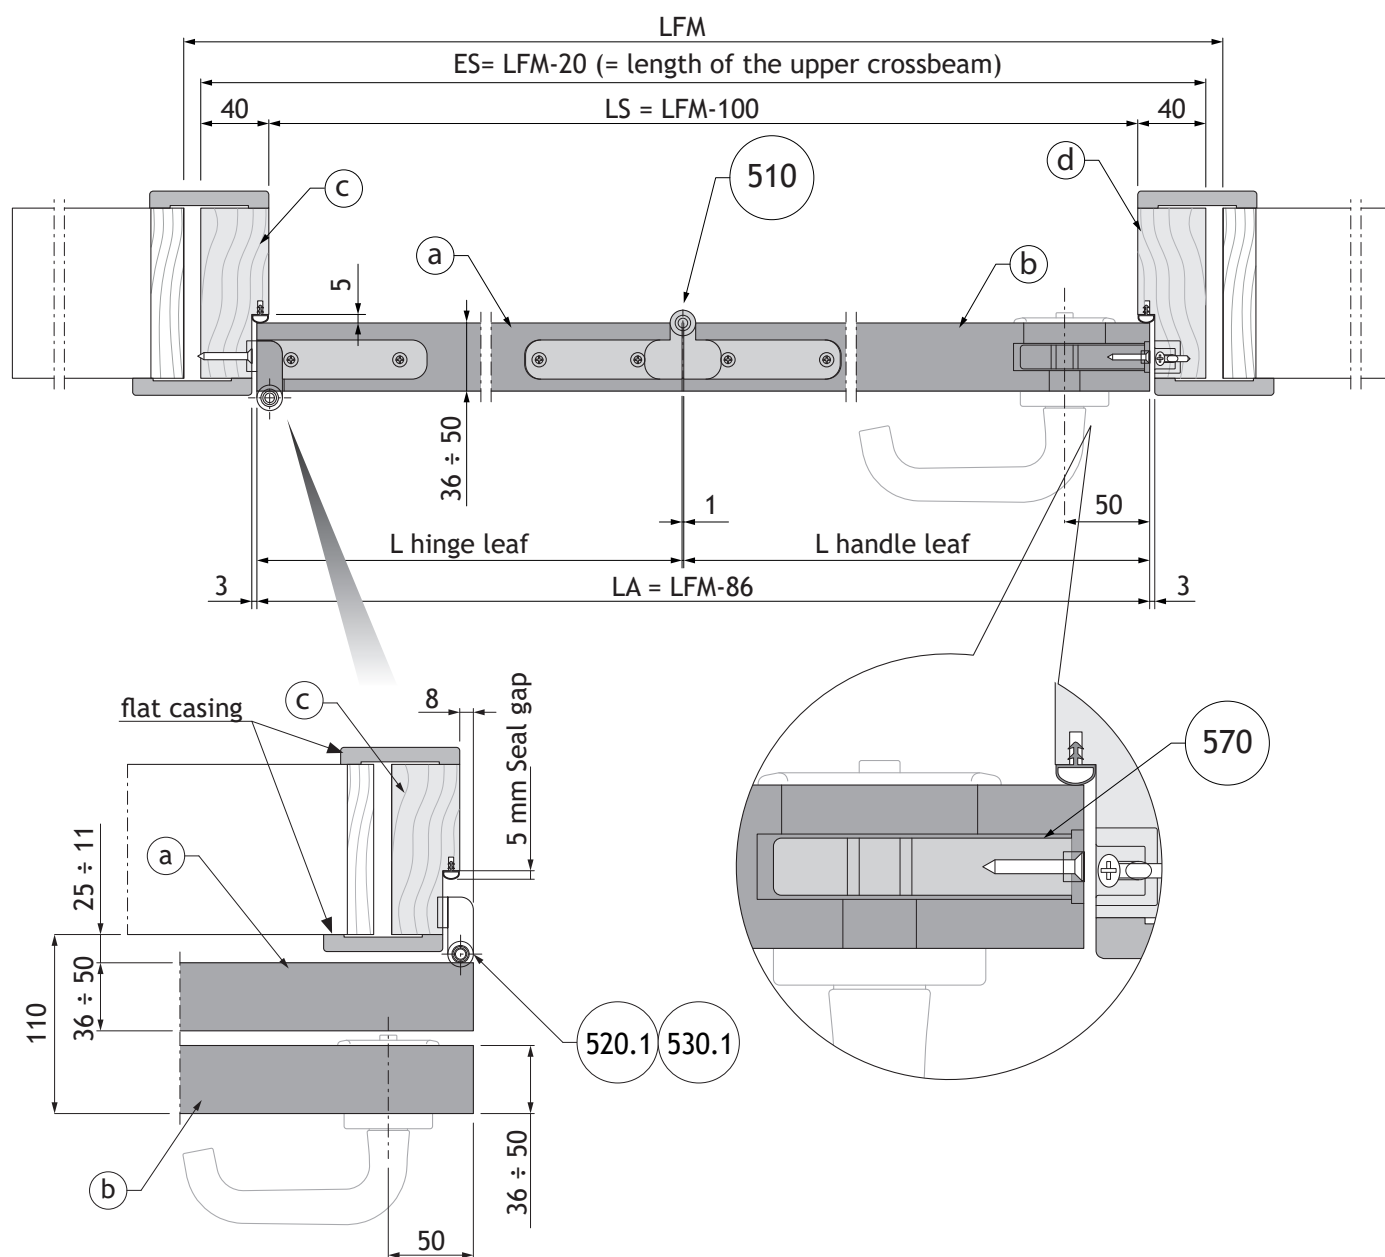


LFM = Wall Hole Width
ES = Outer Jamb
LS = Door Jamb Opening
LA = Leaf Width

Part list		
Ref.	Q.ty	Description
510	1	Central hinge lower
520.1	1	Lateral hinge lower for leaf RH or LH
530.1	1	Lateral hinge lower for jamb RH or LH
570	1	Magnetic lock Compack Living with strikers and special square spindle (optional)
a	1	Hinge leaf
b	1	Handle leaf
c	1	Hinge side door jamb
d	1	Handle side door jamb

3.6 Dimensional diagram of the door - symmetric leaves (Version 1)

Version 1 - symmetric leaves							
LFM	LP	L** hinge leaf	L** handle leaf	Z	V	art. COMPACT	
						BLACK finish	INOX finish
700	592	306,5	306,5	355	250	805F60DX 805F60SX	825F60DX 825F60SX
800	692	356,5	356,5	405	300	805F70DX 805F70SX	825F70DX 825F70SX
900	792	406,5	406,5	455	350	805A80DX 805A80SX	825A80DX 825A80SX
1000	892	456,5	456,5	505	400	805B90DX 805B90SX	825B90DX 825B90SX
1100	992	506,5	506,5	555	450	805B100DX 805B100SX	825B100DX 825B100SX


LFM = Wall Hole Width
LP = Passage Dimension
Z = Encumbrance in opening
V = Encumbrance on the wall

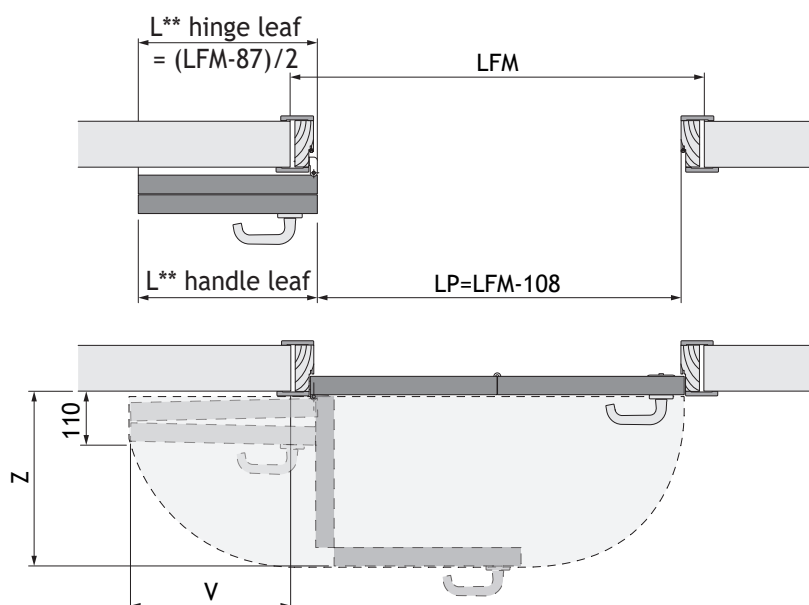

Example of Left Door
(Right door is symmetric)

Upper hardware seat diagram (see chapter 4. DIMENSIONAL SUMMARIES)

Version 1 - symmetric leaves					
art. COMPACT		L** hinge leaf	dimension X	L** handle leaf	dimension Y
BLACK finish	INOX finish				
805F60DX 805F60SX	825F60DX 825F60SX	306,5	208	306,5	234
805F70DX 805F70SX	825F70DX 825F70SX	356,5	208	356,5	234
805A80DX 805A80SX	825A80DX 825A80SX	406,5	258	406,5	284
805B90DX 805B90SX	825B90DX 825B90SX	456,5	358	456,5	384
805B100DX 805B100SX	825B100DX 825B100SX	506,5	358	506,5	384

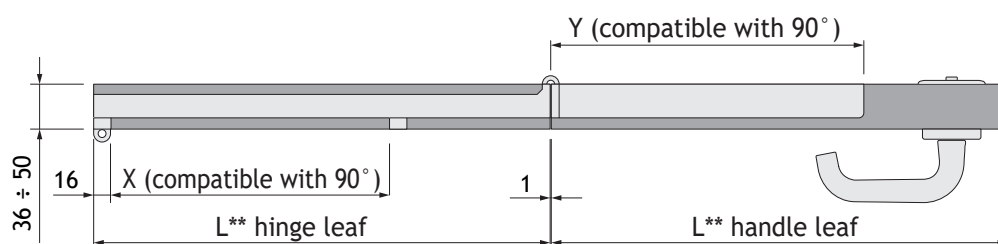

(**) Hinge leaf and handle leaf widths are calculated with a reciprocal distance of 1 mm.

3.7 Dimensional diagram of the door - asymmetric leaves (Version 2)

Handle leaf from -50 to 0 larger


Version 2 - asymmetric leaves (handle leaf from -50 to 0 larger)							
LFM	LP	L** hinge leaf	L** handle leaf	Z	V	art. COMPACT	
						BLACK finish	INOX finish
650 ÷ 700	542 ÷ 592	306,5	256,5 ÷ 306,5	355	250	805F60DX 805F60SX	825F60DX 825F60SX
750 ÷ 800	642 ÷ 692	356,5	306,5 ÷ 356,5	405	300	805F70DX 805F70SX	825F70DX 825F70SX
850 ÷ 900	742 ÷ 792	406,5	356,5 ÷ 406,5	455	350	805A80DX 805A80SX	825A80DX 825A80SX
950 ÷ 1000	842 ÷ 892	456,5	406,5 ÷ 456,5	505	400	805B90DX 805B90SX	825B90DX 825B90SX
1050 ÷ 1100	942 ÷ 992	506,5	456,5 ÷ 506,5	555	450	805B100DX 805B100SX	825B100DX 825B100SX

LFM = Wall Hole Width


LP = Passage Dimension

Z = Encumbrance in opening

V = Encumbrance on the wall

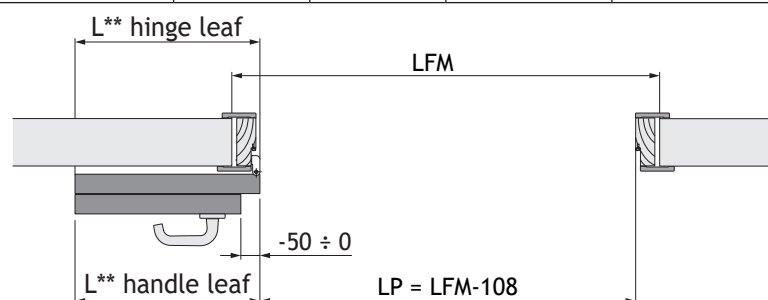


Example of Left Door
(Right door is symmetric)

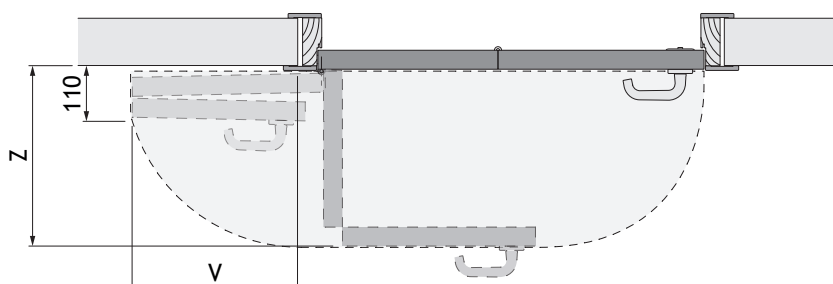

Upper hardware seat diagram (see chapter 4. DIMENSIONAL SUMMARIES)

Version 2 - asymmetric leaves (handle leaf from -50 to 0 larger)					
art. COMPACT		L** hinge leaf	dimension X	L** handle leaf	dimension Y
BLACK finish	INOX finish				
805F60DX 805F60SX	825F60DX 825F60SX	306,5	208	256,5 ÷ 306,5	234
805F70DX 805F70SX	825F70DX 825F70SX	356,5	208	306,5 ÷ 356,5	234
805A80DX 805A80SX	825A80DX 825A80SX	406,5	258	356,5 ÷ 406,5	284
805B90DX 805B90SX	825B90DX 825B90SX	456,5	358	406,5 ÷ 456,5	384
805B100DX 805B100SX	825B100DX 825B100SX	506,5	358	456,5 ÷ 506,5	384

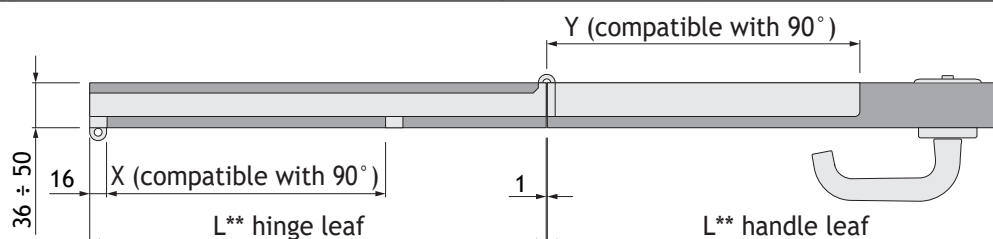

(**) Hinge leaf and handle leaf widths are calculated with a reciprocal distance of 1 mm.

3.8 Dimensional diagram of the door - asymmetric leaves (Version 3)

Handle leaf from 0 to +200 lower

Version 3 - asymmetric leaves (handle leaf from 0 to +200 lower)							
LFM	LP	L** hinge leaf	L** handle leaf	Z	V	art. COMPACT	
						BLACK finish	INOX finish
700 ÷ 900	592	306,5	306,5 ÷ 506,5	355	250	805F60DX 805F60SX	825F60DX 825F60SX
800 ÷ 1000	692	356,5	356,5 ÷ 556,5	405	300	805F70DX 805F70SX	825F70DX 825F70SX
900 ÷ 1100	792	406,5	406,5 ÷ 606,5	455	350	805A80DX 805A80SX	825A80DX 825A80SX
1000 ÷ 1200	892	456,5	456,5 ÷ 656,5	505	400	805B90DX 805B90SX	825B90DX 825B90SX
1100 ÷ 1300	992	506,5	506,5 ÷ 706,5	555	450	805B100DX 805B100SX	825B100DX 825B100SX

This variant also allows using a double handle or a double knob with a traditional lock, when the door's protrusion allows this.


LFM = Wall Hole Width

LP = Passage Dimension

Z = Encumbrance in opening


V = Encumbrance on the wall

Example of Left Door
(Right door is symmetric)

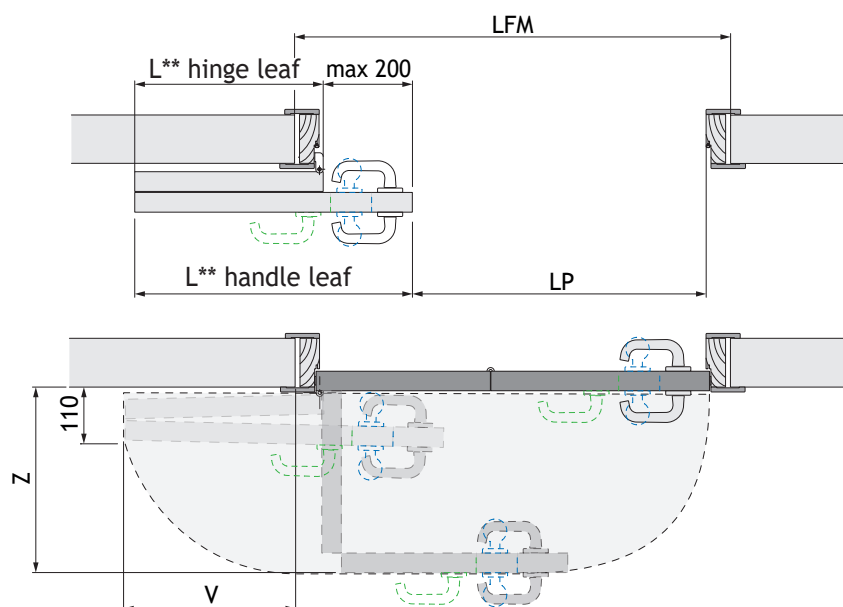

Upper hardware seat diagram (see chapter 4. DIMENSIONAL SUMMARIES)

Version 3 - asymmetric leaves (handle leaf from 0 to +200 lower)					
art. COMPACT		L** hinge leaf	dimension X	L** handle leaf	dimension Y
BLACK finish	INOX finish				
805F60DX 805F60SX	825F60DX 825F60SX	306,5	208	306,5 ÷ 506,5	234
805F70DX 805F70SX	825F70DX 825F70SX	356,5	208	356,5 ÷ 556,5	234
805A80DX 805A80SX	825A80DX 825A80SX	406,5	258	406,5 ÷ 606,5	284
805B90DX 805B90SX	825B90DX 825B90SX	456,5	358	456,5 ÷ 656,5	384
805B100DX 805B100SX	825B100DX 825B100SX	506,5	358	506,5 ÷ 706,5	384

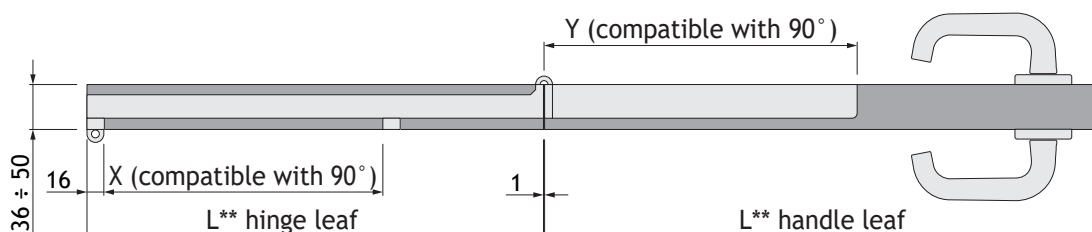

(**) Hinge leaf and handle leaf widths are calculated with a reciprocal distance of 1 mm.

4. DIMENSIONAL SUMMARIES

4.1 Single opening door

The following form is a summary all of possible realizable dimensions with the measurements. The **COMPACT LIVING 180°** system foresee a minimum wall opening (**LFM**) of 700 mm with symmetric leaves and of 650 mm with asymmetric leaves.

The maximum wall opening (**LFM**) with symmetric leaves is 1100 mm.

For measurements of **LFM** larger than 1100 mm is necessary to increase the dimensions of the handle door leaf.

Summary dimensions for single opening door

Version 1 - symmetric leaves									
Wall Hole Width LFM	Passage Dimension LP	Fix Dimension L** hinge leaf	Working dimension x	Variable Dimension L** handle leaf	Working dimension y	Encumbrance in opening Z	Encumbrance on the wall V	art. COMPACT	
								BLACK finish	INOX finish
700	592	306,5	208	306,5	234	355	250	805F60DX 805F60SX	825F60DX 825F60SX
800	692	356,5	208	356,5	234	405	300	805F70DX 805F70SX	825F70DX 825F70SX
900	792	406,5	258	406,5	284	455	350	805A80DX 805A80SX	825A80DX 825A80SX
1000	892	456,5	358	456,5	384	505	400	805B90DX 805B90SX	825B90DX 825B90SX
1100	992	506,5	358	506,5	384	555	450	805B100DX 805B100SX	825B100DX 825B100SX


Version 2 - asymmetric leaves (handle leaf from -50 to 0 lower)									
Wall Hole Width LFM	Passage Dimension LP	Fix Dimension L** hinge leaf	Working dimension x	Variable Dimension L** handle leaf	Working dimension y	Encumbrance in opening Z	Encumbrance on the wall V	art. COMPACT	
								BLACK finish	INOX finish
650 ÷ 700	542 ÷ 592	306,5	208	256,5 ÷ 306,5	234	355	250	805F60DX 805F60SX	825F60DX 825F60SX
750 ÷ 800	642 ÷ 692	356,5	208	306,5 ÷ 356,5	234	405	300	805F70DX 805F70SX	825F70DX 825F70SX
850 ÷ 900	742 ÷ 792	406,5	258	356,5 ÷ 406,5	284	455	350	805A80DX 805A80SX	825A80DX 825A80SX
950 ÷ 1000	842 ÷ 892	456,5	358	406,5 ÷ 456,5	384	505	400	805B90DX 805B90SX	825B90DX 825B90SX
1050 ÷ 1100	942 ÷ 992	506,5	358	456,5 ÷ 506,5	384	555	450	805B100DX 805B100SX	825B100DX 825B100SX

Version 3 - asymmetric leaves (handle leaf from 0 to +200 larger)									
Wall Hole Width LFM	Passage Dimension LP	Fix Dimension L** hinge leaf	Working dimension x	Variable Dimension L** handle leaf	Working dimension y	Encumbrance in opening Z	Encumbrance on the wall V	art. COMPACT	
								BLACK finish	INOX finish
700 ÷ 900	592	306,5	208	306,5 ÷ 506,5	234	355	250	805F60DX 805F60SX	825F60DX 825F60SX
800 ÷ 1000	692	356,5	208	356,5 ÷ 556,5	234	405	300	805F70DX 805F70SX	825F70DX 825F70SX
900 ÷ 1100	792	406,5	258	406,5 ÷ 606,5	284	455	350	805A80DX 805A80SX	825A80DX 825A80SX
1000 ÷ 1200	892	456,5	358	456,5 ÷ 656,5	384	505	400	805B90DX 805B90SX	825B90DX 825B90SX
1100 ÷ 1300	992	506,5	358	506,5 ÷ 706,5	384	555	450	805B100DX 805B100SX	825B100DX 825B100SX

4.2 Dimensional diagram of the double opening door

Dimensional example

Attention: you need to use two hardwares COMPACT LIVING, one right and one left.

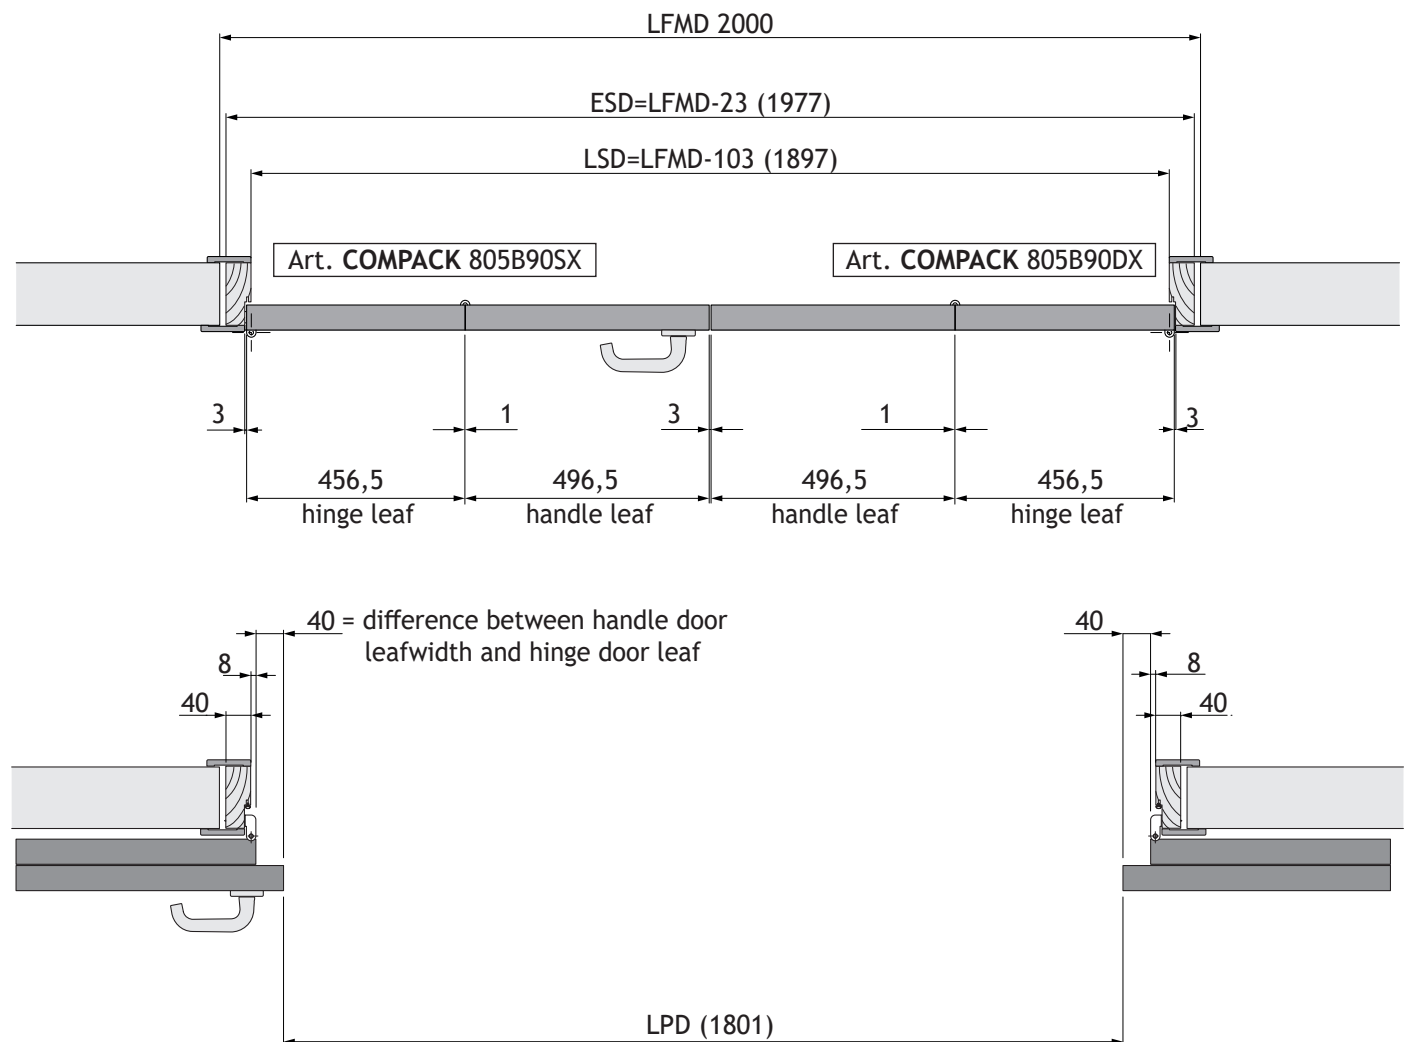





LFMD = Double Wall Opening Width

ESD = External Jamb Double (LFMD-23)

LSD = Light Jamb Double (LFMD-103)

LPD = Width Passage Double Door Leaf

4.3 COMPACT LIVING 180° - 90° combination possibilities on double doors

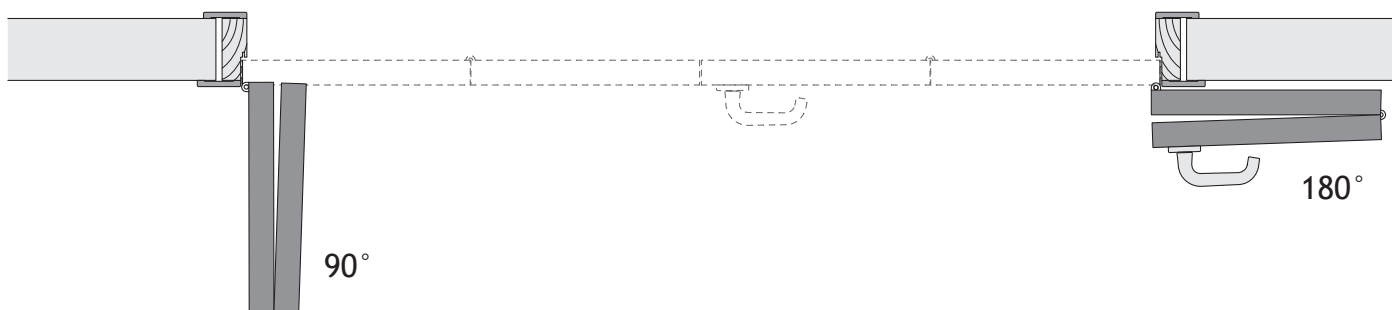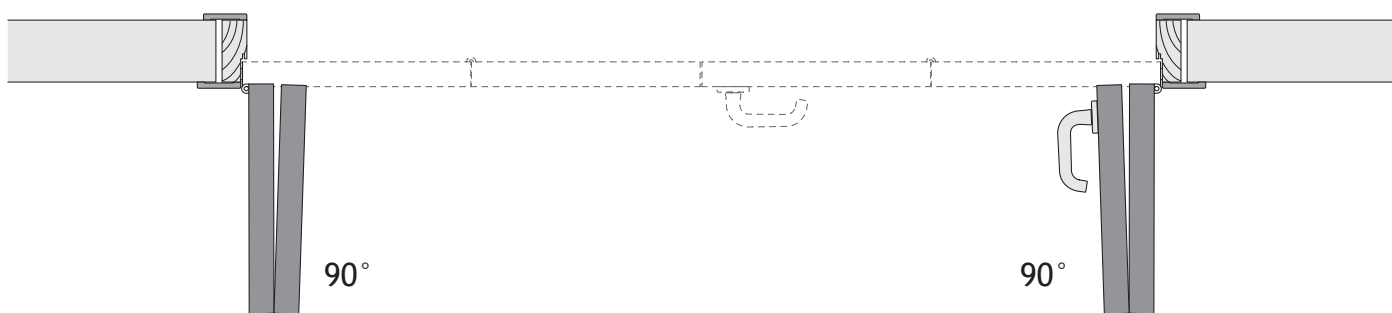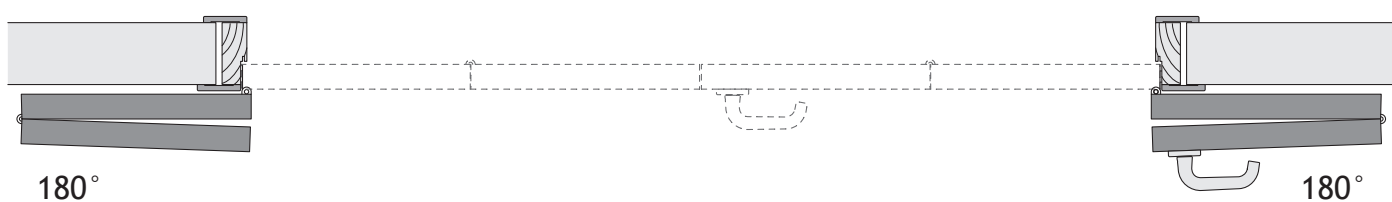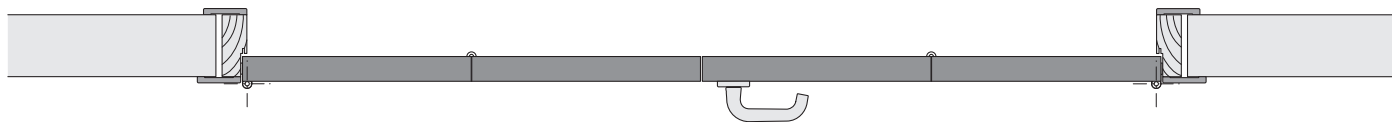

- Possible combinations using the same components in wood

4.4 Double opening door

The following form is a summary all of possible realizable dimensions with the measurements. The **COMPACT LIVING 180°** system foresee a minimum wall opening (**LFM**) of 1320 mm with symmetric leaves and of 1220 mm with asymmetric leaves.

The maximum wall opening (**LFM**) with symmetric leaves is 2120 mm.

For measurements of **LFM** larger than 2120 mm is necessary to increase the dimensions of the handle door leaf.

Summary dimensions for double opening door

Version 1 - symmetric leaves									
Wall Hole Width LFM	Passage Dimension LP	Fix Dimension L** hinge leaf	Working dimension x	Variable Dimension L** handle leaf	Working dimension y	Encumbrance in opening Z	Encumbrance on the wall V	art. COMPACT	
								BLACK finish	INOX finish
1320	1201	306,5	208	306,5	234	355	250	805F60DX 805F60SX	825F60DX 825F60SX
1520	1401	356,5	208	356,5	234	405	300	805F70DX 805F70SX	825F70DX 825F70SX
1720	1601	406,5	258	406,5	284	455	350	805A80DX 805A80SX	825A80DX 825A80SX
1920	1801	456,5	358	456,5	384	505	400	805B90DX 805B90SX	825B90DX 825B90SX
2120	2001	506,5	358	506,5	384	555	450	805B100DX 805B100SX	825B100DX 825B100SX


Version 2 - asymmetric leaves (handle leaf from -50 to 0 lower)									
Wall Hole Width LFM	Passage Dimension LP	Fix Dimension L** hinge leaf	Working dimension x	Variable Dimension L** handle leaf	Working dimension y	Encumbrance in opening Z	Encumbrance on the wall V	art. COMPACT	
								BLACK finish	INOX finish
1220 ÷ 1320	1101 ÷ 1201	306,5	208	256,5 ÷ 306,5	234	355	250	805F60DX 805F60SX	825F60DX 825F60SX
1420 ÷ 1520	1301 ÷ 1401	356,5	208	306,5 ÷ 356,5	234	405	300	805F70DX 805F70SX	825F70DX 825F70SX
1620 ÷ 1720	1501 ÷ 1601	406,5	258	356,5 ÷ 406,5	284	455	350	805A80DX 805A80SX	825A80DX 825A80SX
1820 ÷ 1920	1701 ÷ 1801	456,5	358	406,5 ÷ 456,5	384	505	400	805B90DX 805B90SX	825B90DX 825B90SX
2020 ÷ 2120	1901 ÷ 2001	506,5	358	456,5 ÷ 506,5	384	555	450	805B100DX 805B100SX	825B100DX 825B100SX

Version 3 - asymmetric leaves (handle leaf from 0 to +200 larger)									
Wall Hole Width LFM	Passage Dimension LP	Fix Dimension L** hinge leaf	Working dimension x	Variable Dimension L** handle leaf	Working dimension y	Encumbrance in opening Z	Encumbrance on the wall V	art. COMPACT	
								BLACK finish	INOX finish
1320 ÷ 1720	1201	306,5	208	306,5 ÷ 506,5	234	355	250	805F60DX 805F60SX	825F60DX 825F60SX
1520 ÷ 1920	1401	356,5	208	356,5 ÷ 556,5	234	405	300	805F70DX 805F70SX	825F70DX 825F70SX
1720 ÷ 2120	1601	406,5	258	406,5 ÷ 606,5	284	455	350	805A80DX 805A80SX	825A80DX 825A80SX
1920 ÷ 2320	1801	456,5	358	456,5 ÷ 656,5	384	505	400	805B90DX 805B90SX	825B90DX 825B90SX
2120 ÷ 2520	2001	506,5	358	506,5 ÷ 706,5	384	555	450	805B100DX 805B100SX	825B100DX 825B100SX


4.5 Dimensional drawing for a 3-leaf single door

Maintaining the same dimensional characteristics as in the previous tables, a third leaf can be added by connecting it to the handle leaf by means of hinges, thus obtaining very wide openings with the open doors occupying a very small space.


Dimensional example with symmetrical leaves

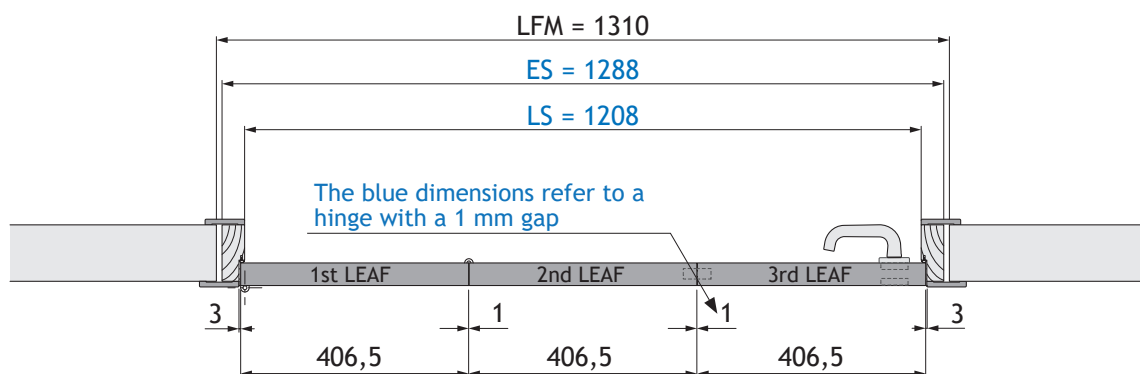

To block the leaf, you can use a traditional sliding bolt or magnet, or the magnetic unlocking system "Push&GO EVO" (see pages 19-20-21)

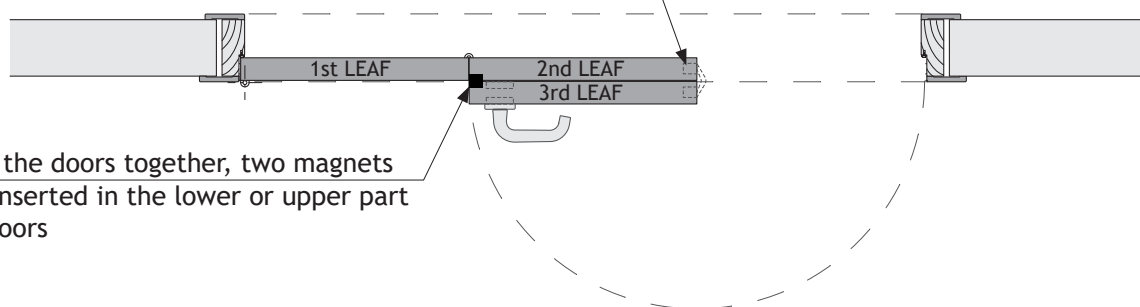


To keep the doors together, two magnets can be inserted in the lower or upper part of the doors

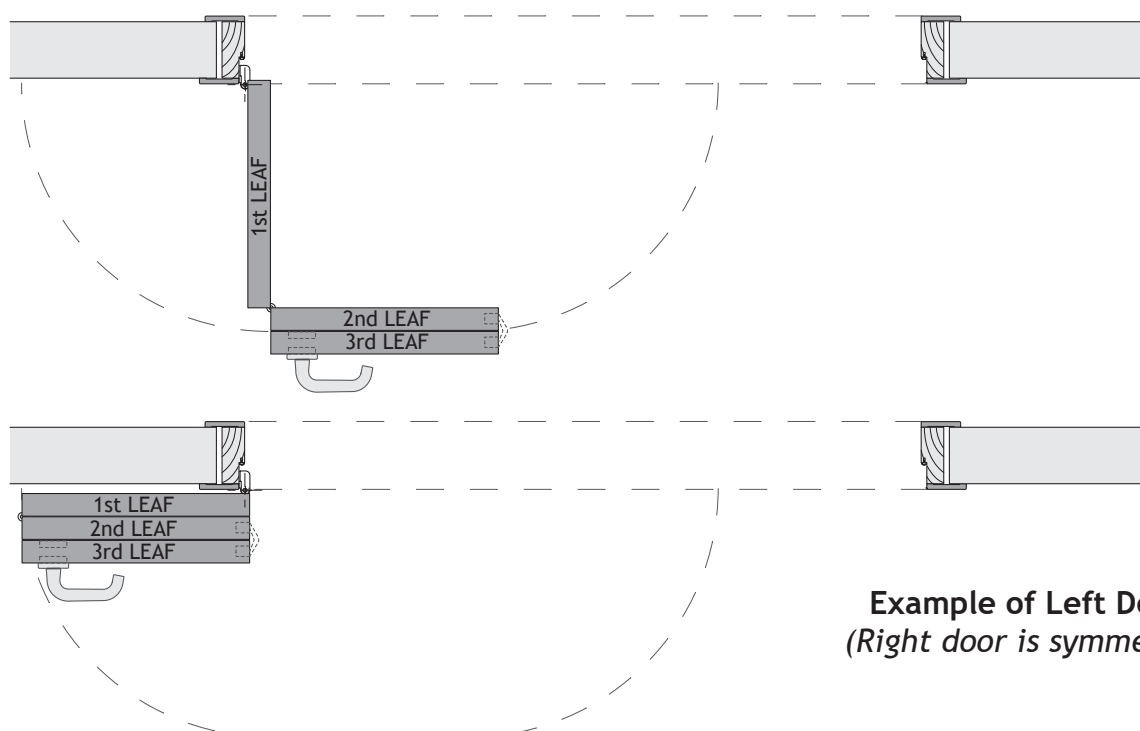


Example of Left Door
(Right door is symmetric)

Dimensional example with asymmetrical leaves:

First and second symmetrical leaves, third asymmetrical leaf

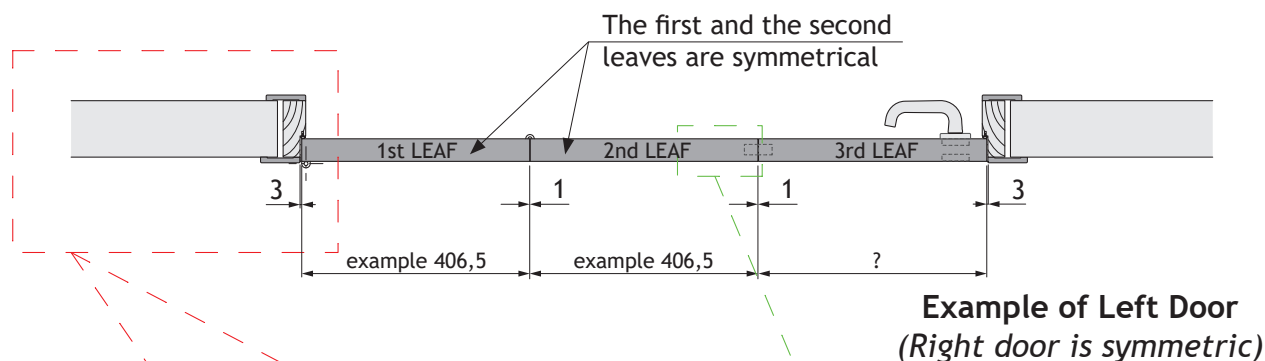


The third leaf is shorter

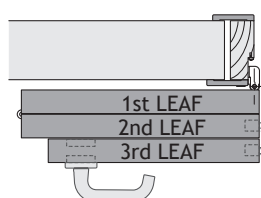


Closing alternatives for the second leaf

Push&Go
• EVO •


For the machining specifications see "Push&Go EVO" technical manual

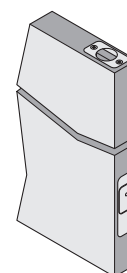


The third leaf is longer

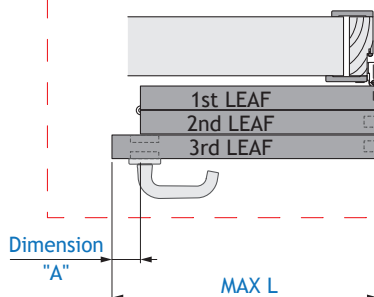

Traditional sliding bolt


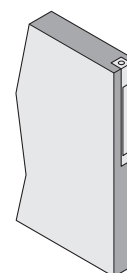


Magnet
(also applicable on the third leaf)

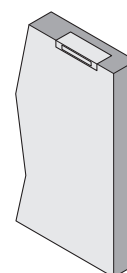


Code	Dimension "A" *	Third door Max L
...F60...	65	598
...F70...	115	698
...A80...	115	798
...B90...	65	898
...B100...	115	998

* When Dimension "A" exceeds the values shown in the table, the total door height must be reduced by 2 mm according to the dimensions shown below, due to incompatibility between the door or handle and the upper protruding hinge (see paragraphs 5.3 and 5.4).

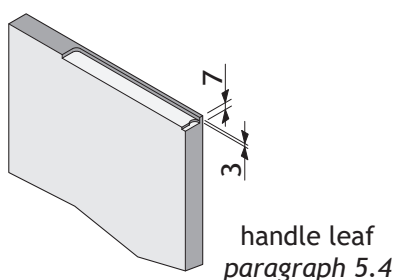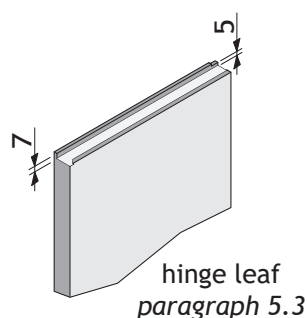


Dimensional example with asymmetric leaves:

Second and third symmetrical leaves, first asymmetrical leaf

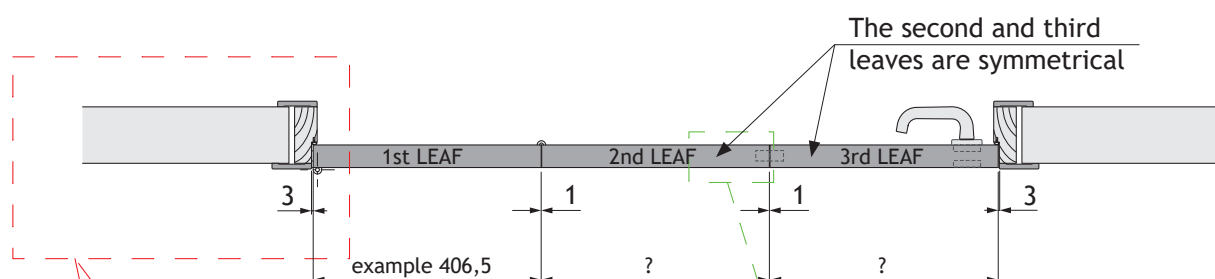


The second and third leaves are longer

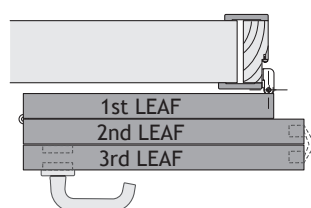


Closing alternatives for the second leaf

Push&Go
• EVO •


For the machining specifications see "Push&Go EVO" technical manual

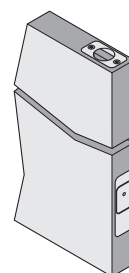

Traditional sliding bolt

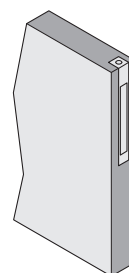


Magnet
(also applicable on the third leaf)

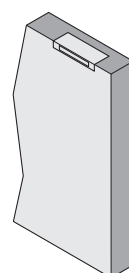

Example of Left Door
(Right door is symmetric)


Dimensional example with asymmetric leaves:

First and third symmetrical leaves, second asymmetrical leaf

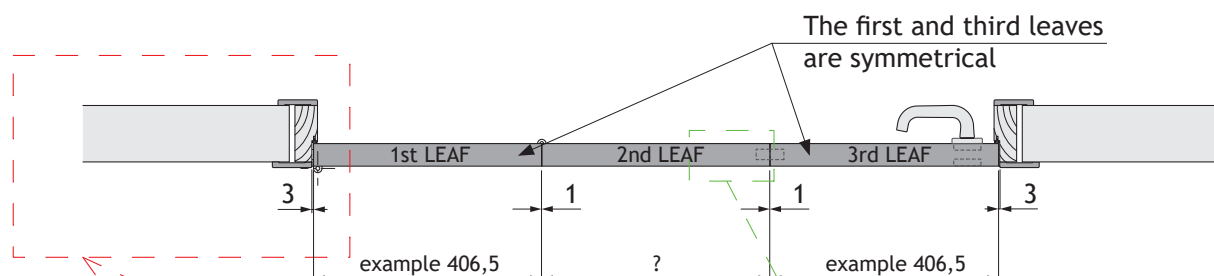

Example of Left Door
(Right door is symmetric)


The first and third leaves are shorter

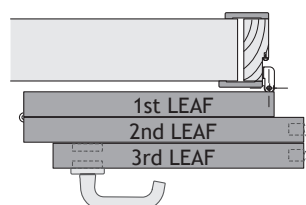


Closing alternatives for the second leaf

Push&Go
• EVO •

For the machining specifications see "Push&Go EVO" technical manual

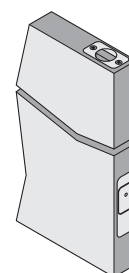


The first and third leaves are longer

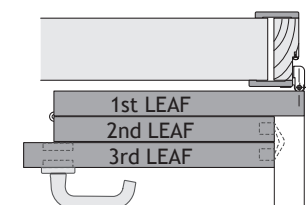


Dimension "A"

Traditional sliding bolt

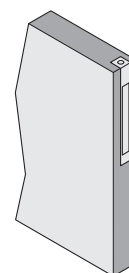


Magnet
(also applicable on the third leaf)

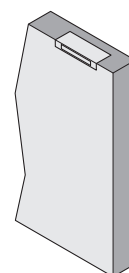


Code	Dimension "A" *
...F60...	65
...F70...	115
...A80...	115
...B90...	65
...B100...	115

* When Dimension "A" exceeds the values shown in the table, the total door height must be reduced by 2 mm according to the dimensions shown below, due to incompatibility between the door or handle and the upper protruding hinge (see paragraphs 5.3 and 5.4).

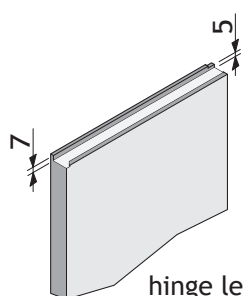




hinge leaf
paragraph 5.3

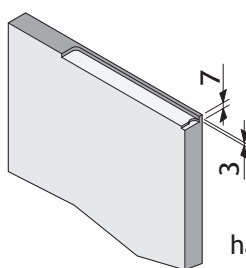

handle leaf
paragraph 5.4

4.6 Dimensional drawing for a 3-leaf double door


Dimensional example with symmetrical leaves

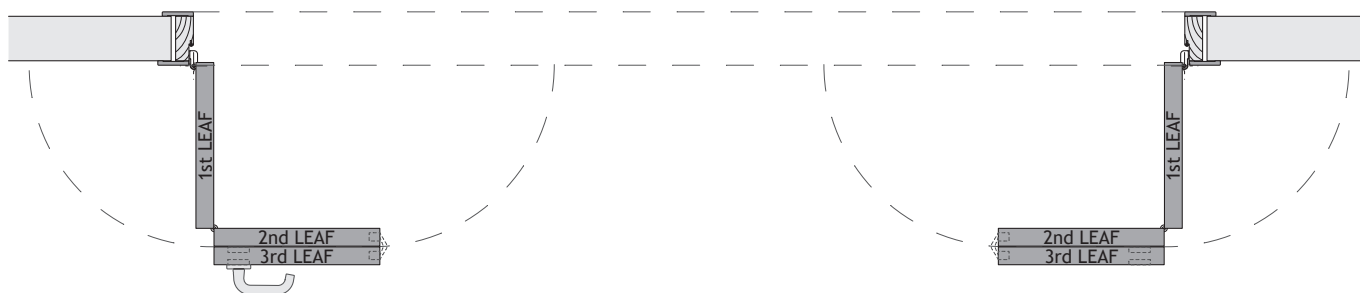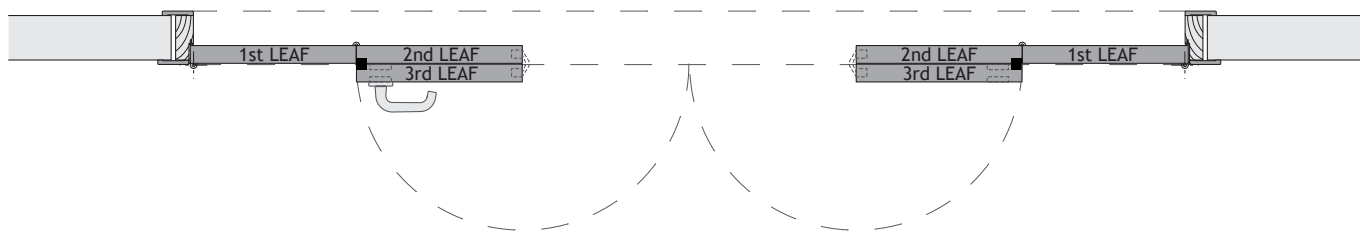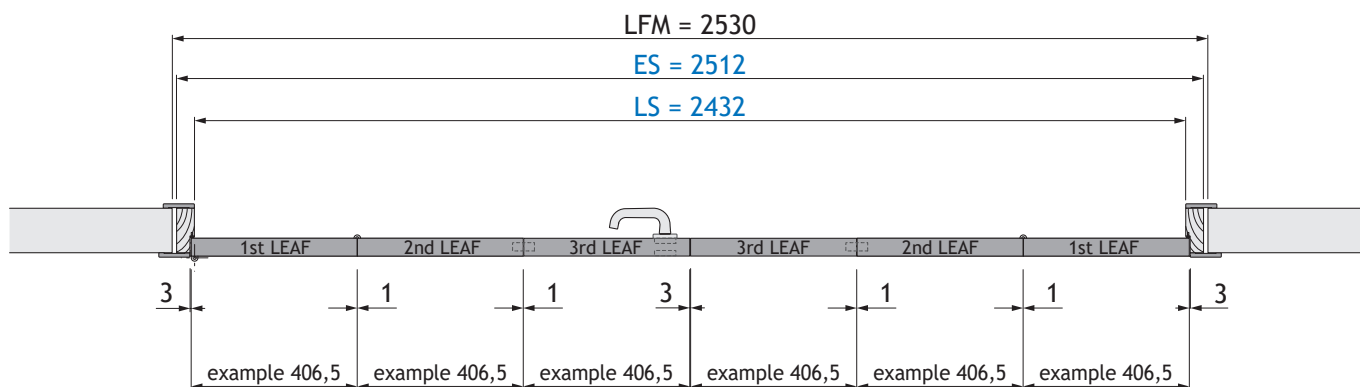

For applications with asymmetric leaves, see pages 19-20-21.


5. COMPONENTS

5.1 Wood components without rabbet profile compatible with COMPACT LIVING 90°

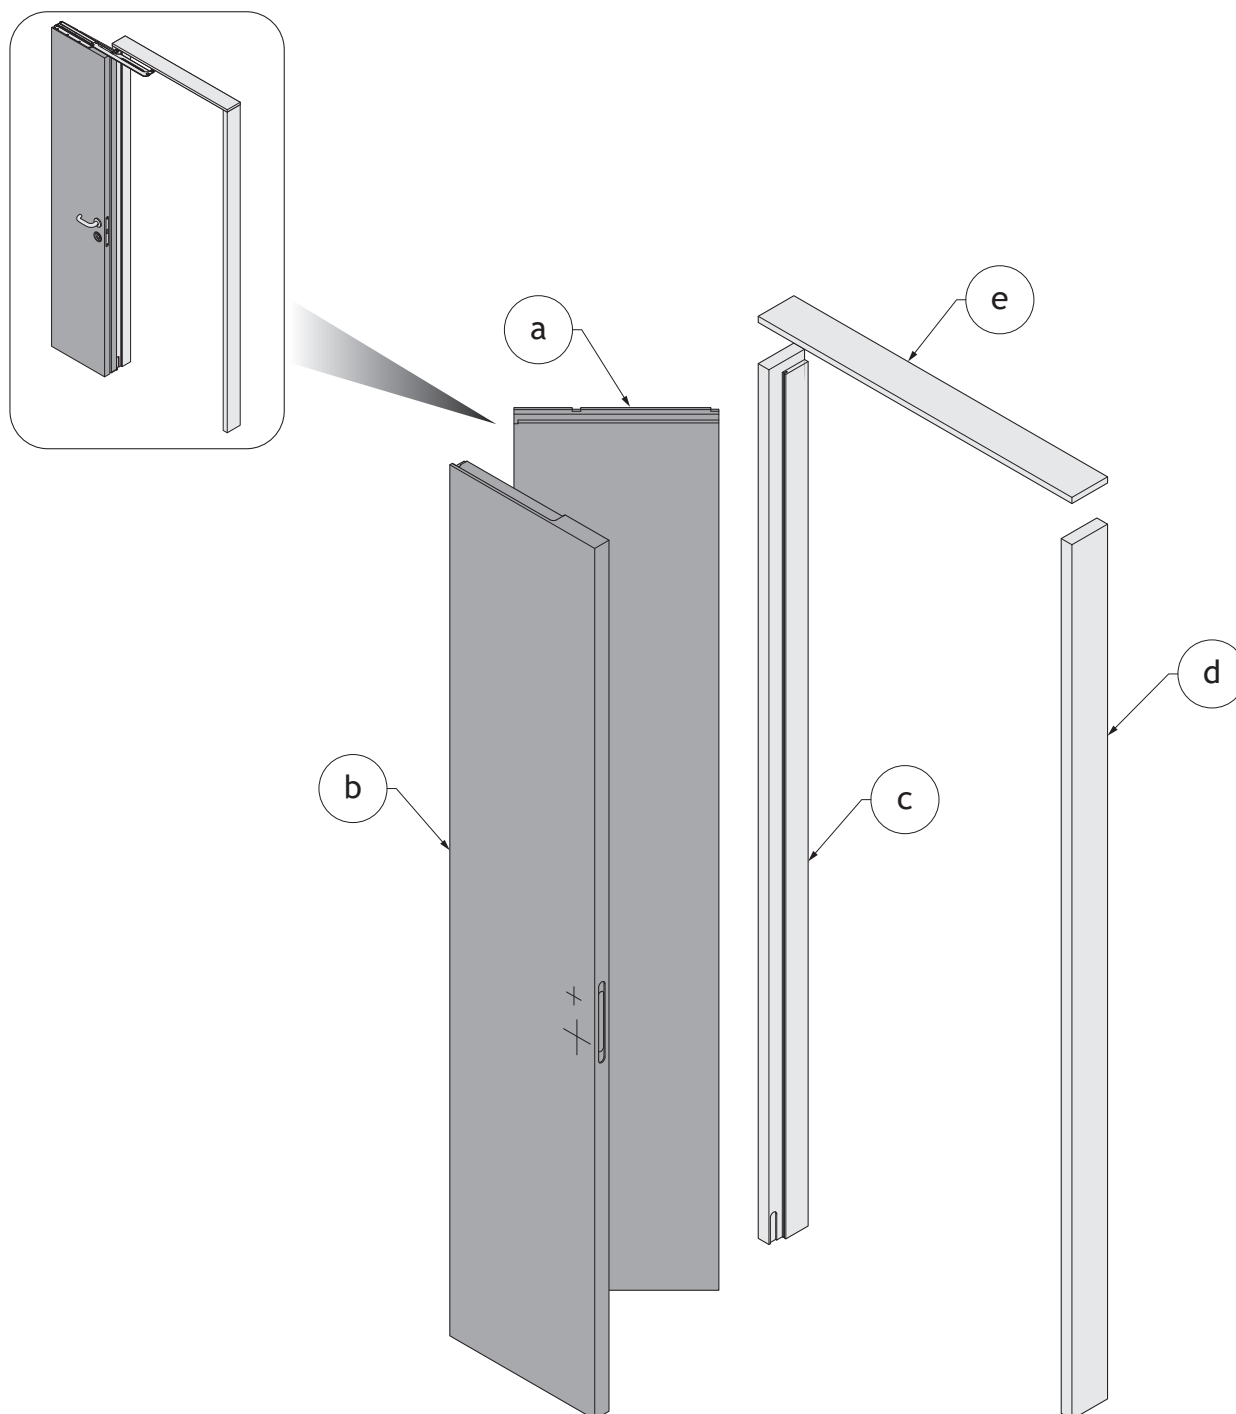

Part list		
Ref.	Q.ty	Description
a	1	Hinge leaf
b	1	Handle leaf
c	1	Hinge side door jamb
d	1	Handle side door jamb
e	1	Upper crossbeam

5.2 Wood components with rabbet profile compatible with COMPACT LIVING 90°

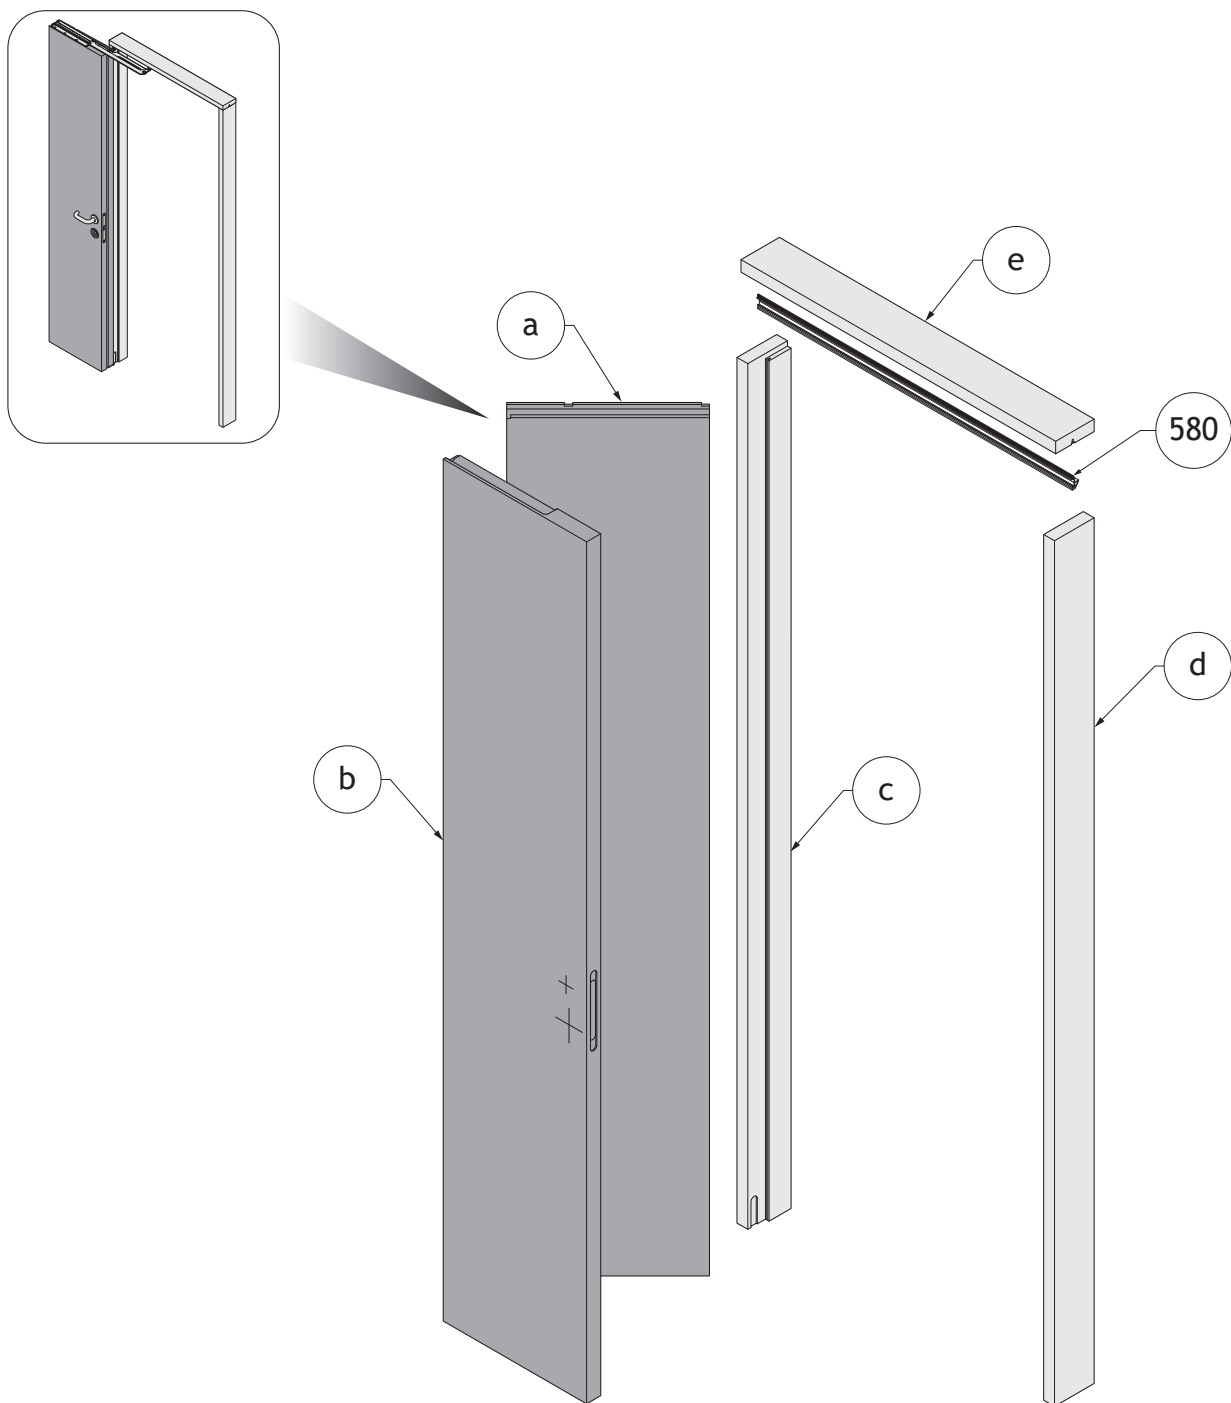


Part list		
Ref.	Q.ty	Description
580	1	Rabbet profile (optional)
a	1	Hinge leaf
b	1	Handle leaf
c	1	Hinge side door jamb
d	1	Handle side door jamb
e	1	Upper crossbeam

5.3 Door leaf hinge side (compatible with COMPACK LIVING 90°)

Left leaf door hinge side (*Right door is symmetric*)


(**) For dimensions see sections 3.6, 3.7, 3.8

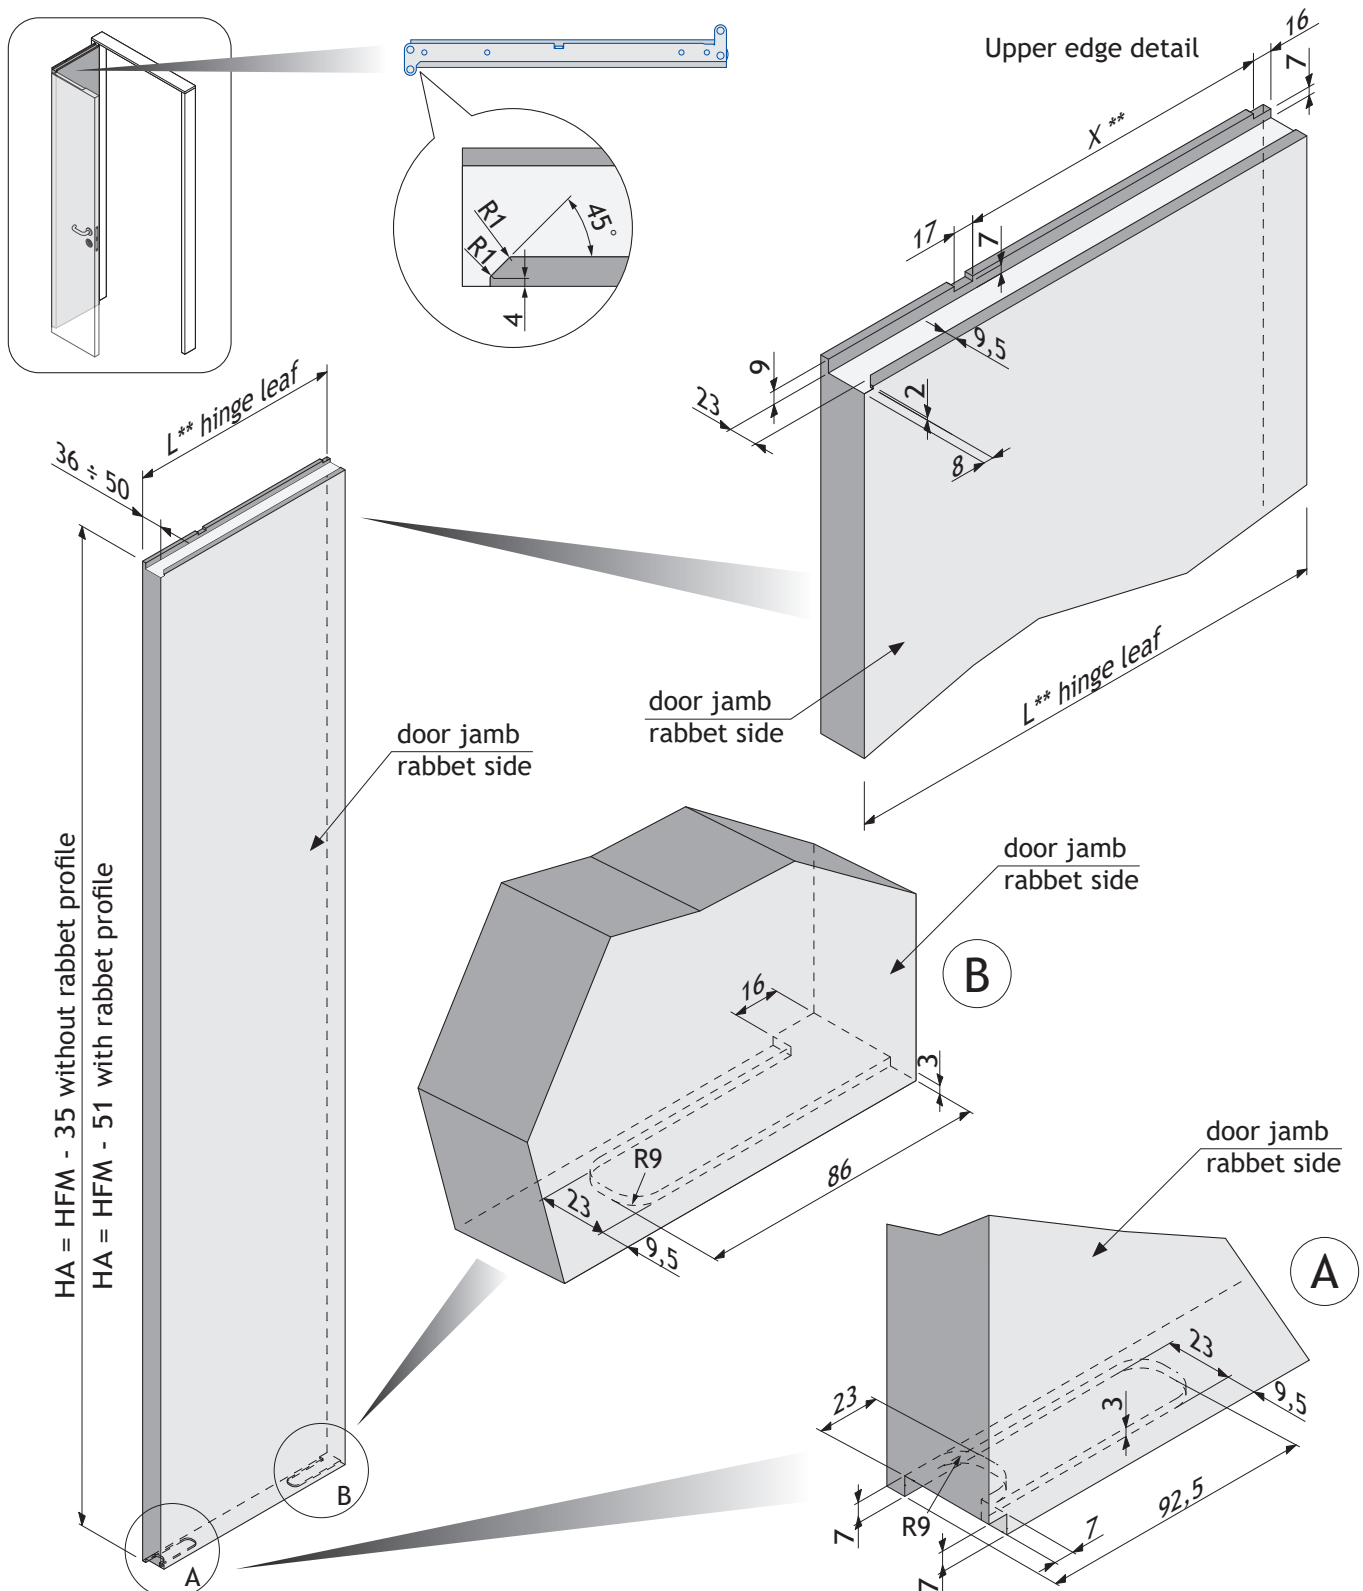

HFM = Wall Hole Height


HA = Leaf Height

(**) For dimensions see sections 3.6, 3.7, 3.8



5.5 Workings for accessories (compatible with COMPACK LIVING 90°)

The operations indicated for the lock seat are mandatory should you wish to use the lever handle on one side only.

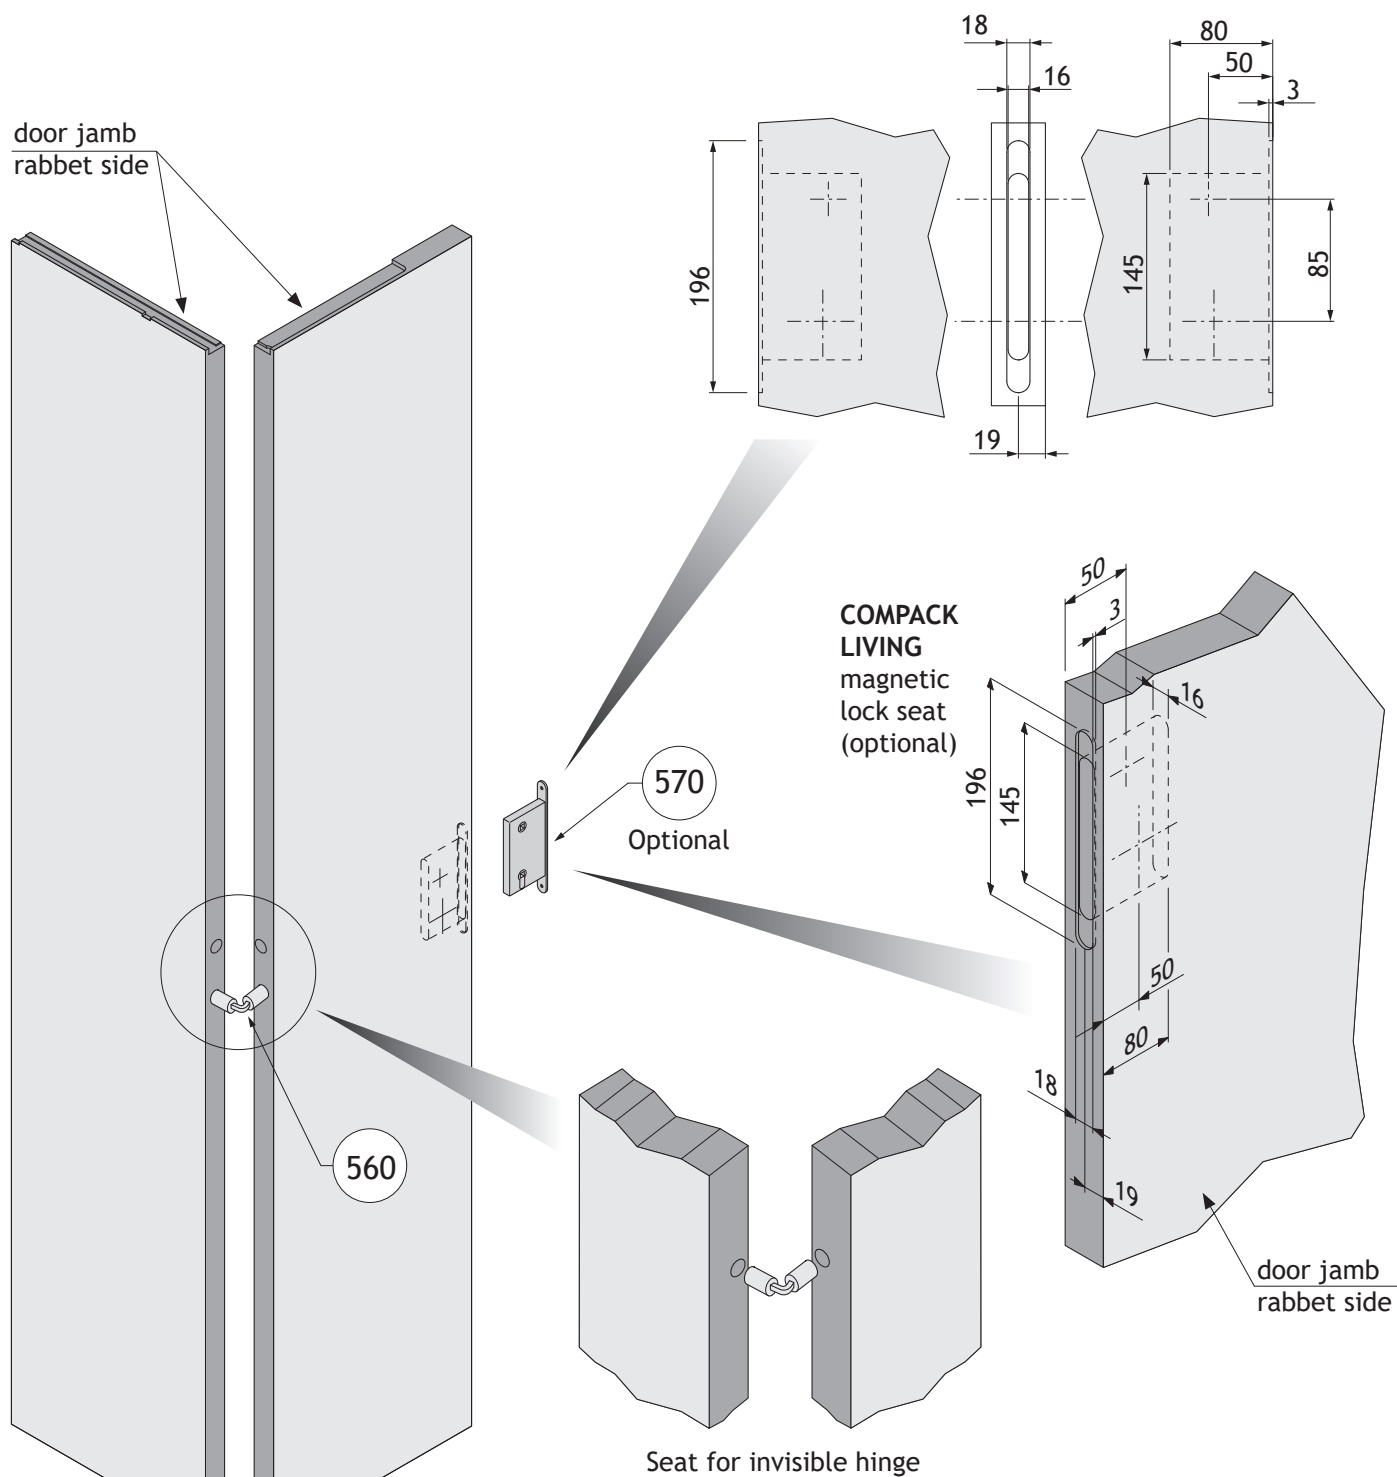


Part list		
Ref.	Q.ty	Description
560	1	Invisible hinge for alignment leaves
570	1	Magnetic lock Compack Living with strikers and special square spindle (optional)

5.6 Door hardware mounting hole diagrams (compatible with COMPACK LIVING 90°)

Door hardware mounting holes for both door systems: 180° and 90°


Hardware group F60

BLACK	INOX
805F60SX	825F60SX
805F60DX	825F60DX
905F60SX	925F60SX
905F60DX	925F60DX

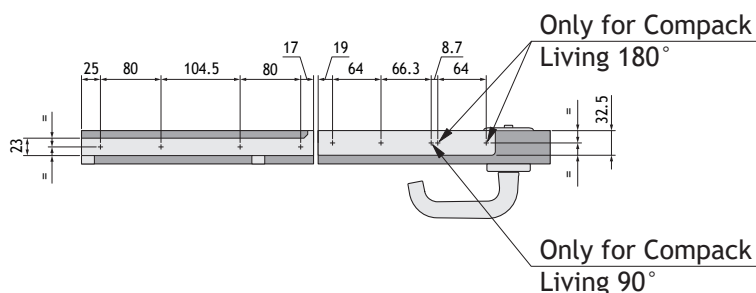


Hardware group F70

BLACK	INOX
805F70SX	825F70SX
805F70DX	825F70DX
905F70SX	925F70SX
905F70DX	925F70DX

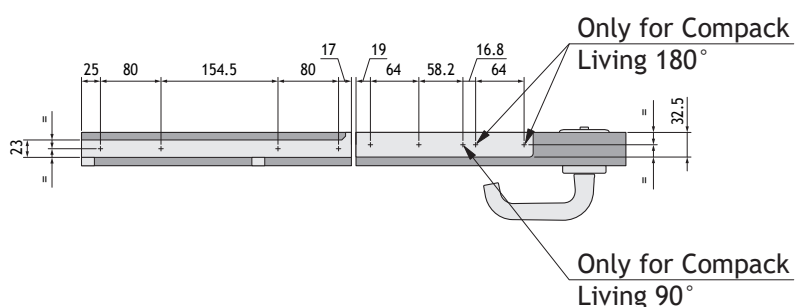


Hardware group A80

BLACK	INOX
805A80SX	825A80SX
805A80DX	825A80DX
905A80SX	925A80SX
905A80DX	925A80DX

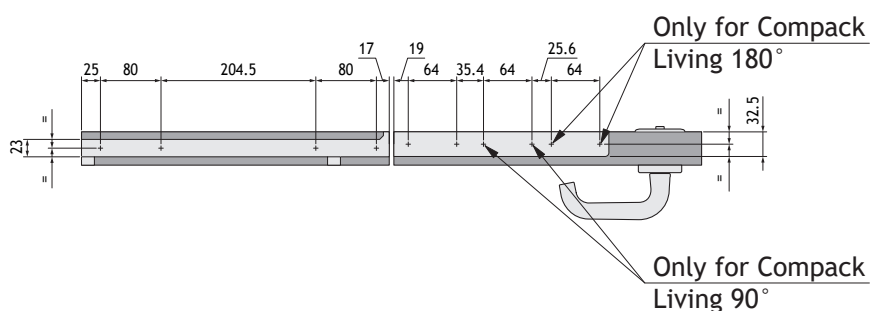


Hardware group B90

BLACK	INOX
805B90SX	825B90SX
805B90DX	825B90DX
905B90SX	925B90SX
905B90DX	925B90DX

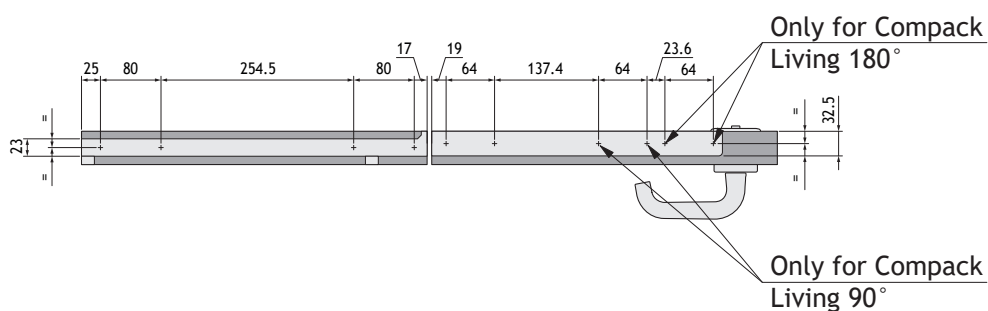


Hardware group B100

BLACK	INOX
805B100SX	825B100SX
805B100DX	825B100DX
905B100SX	925B100SX
905B100DX	925B100DX

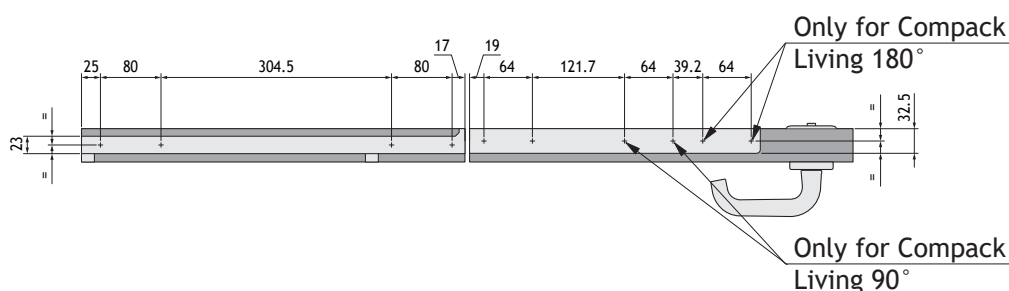

5.7 Hinge side door jamb (compatible with COMPACT LIVING 90°)

Door left jamb hinge side (*Right jamb is symmetric*)

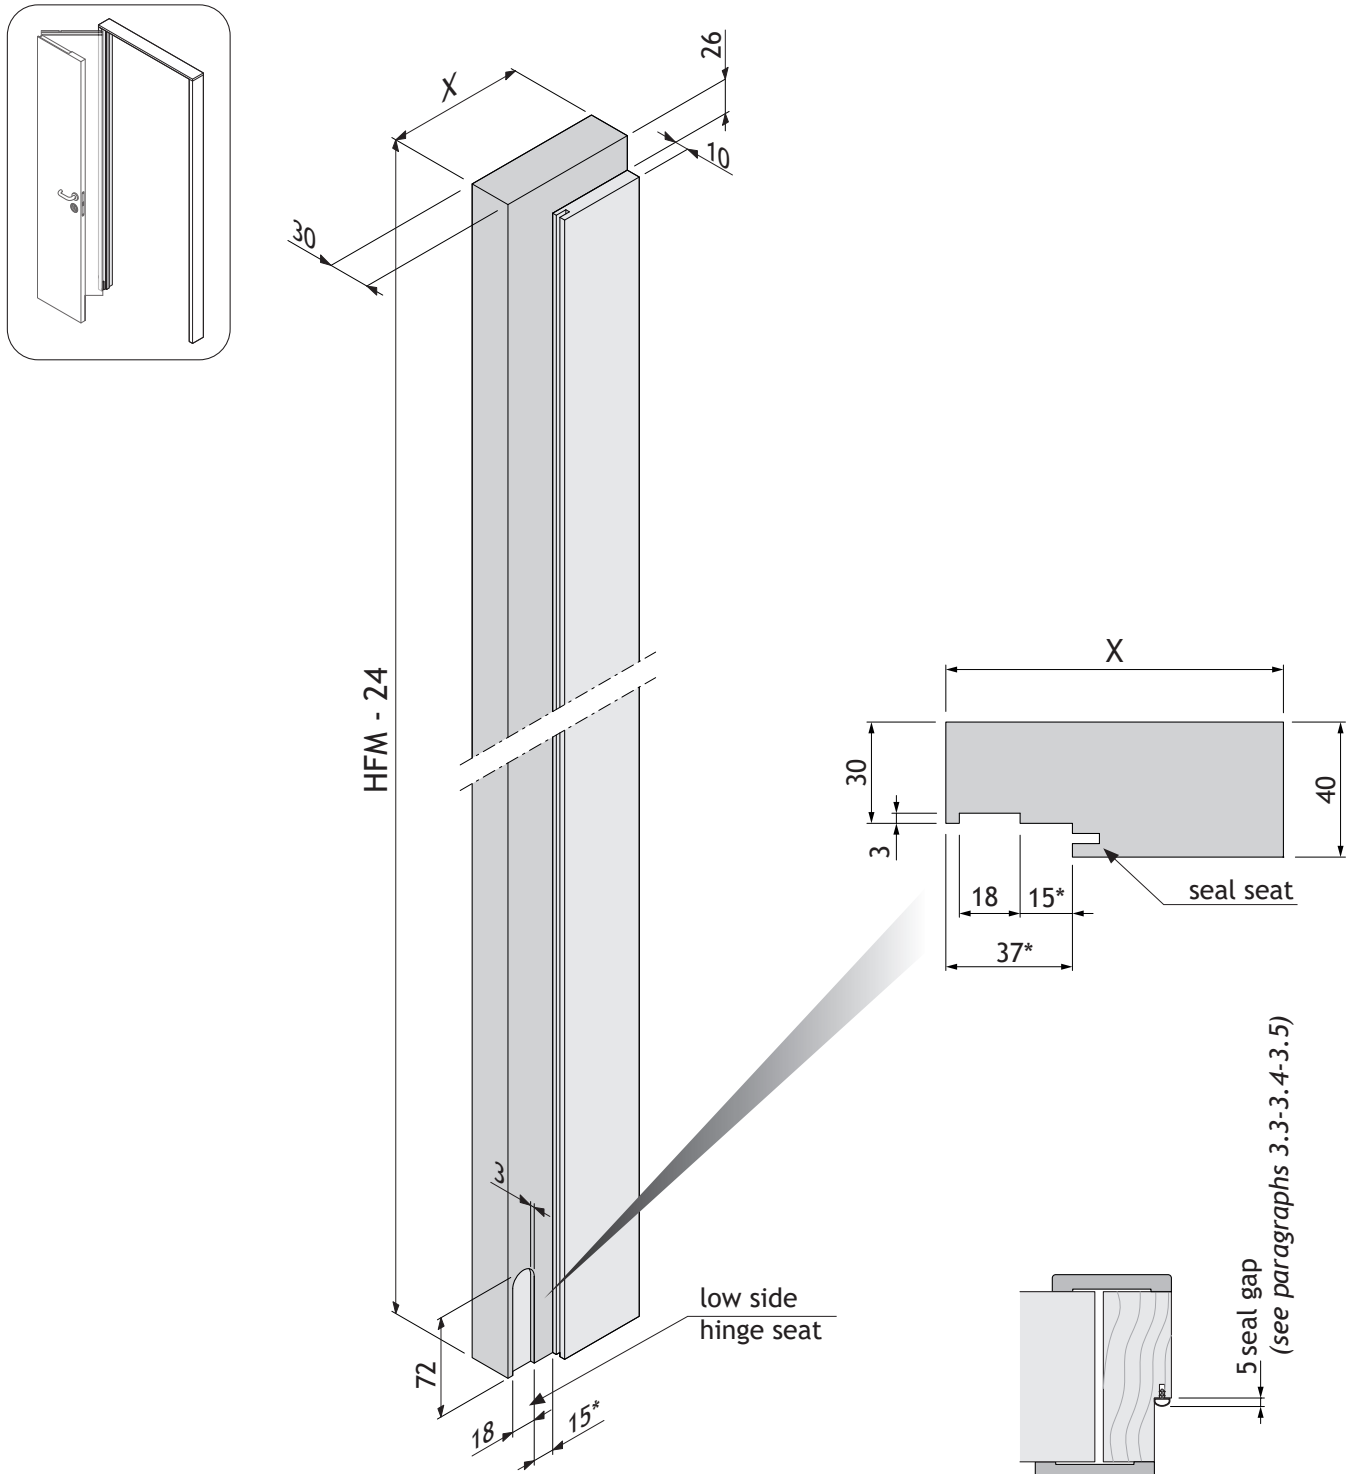


The dimension marked with (*) vary according to the seal gap dimensions

X = Wall Thickness
HFM = Wall Hole Height

5.8 Handle side door jamb (compatible with COMPACT LIVING 90°)



Door left jamb handle side (*Right jamb is symmetric*)

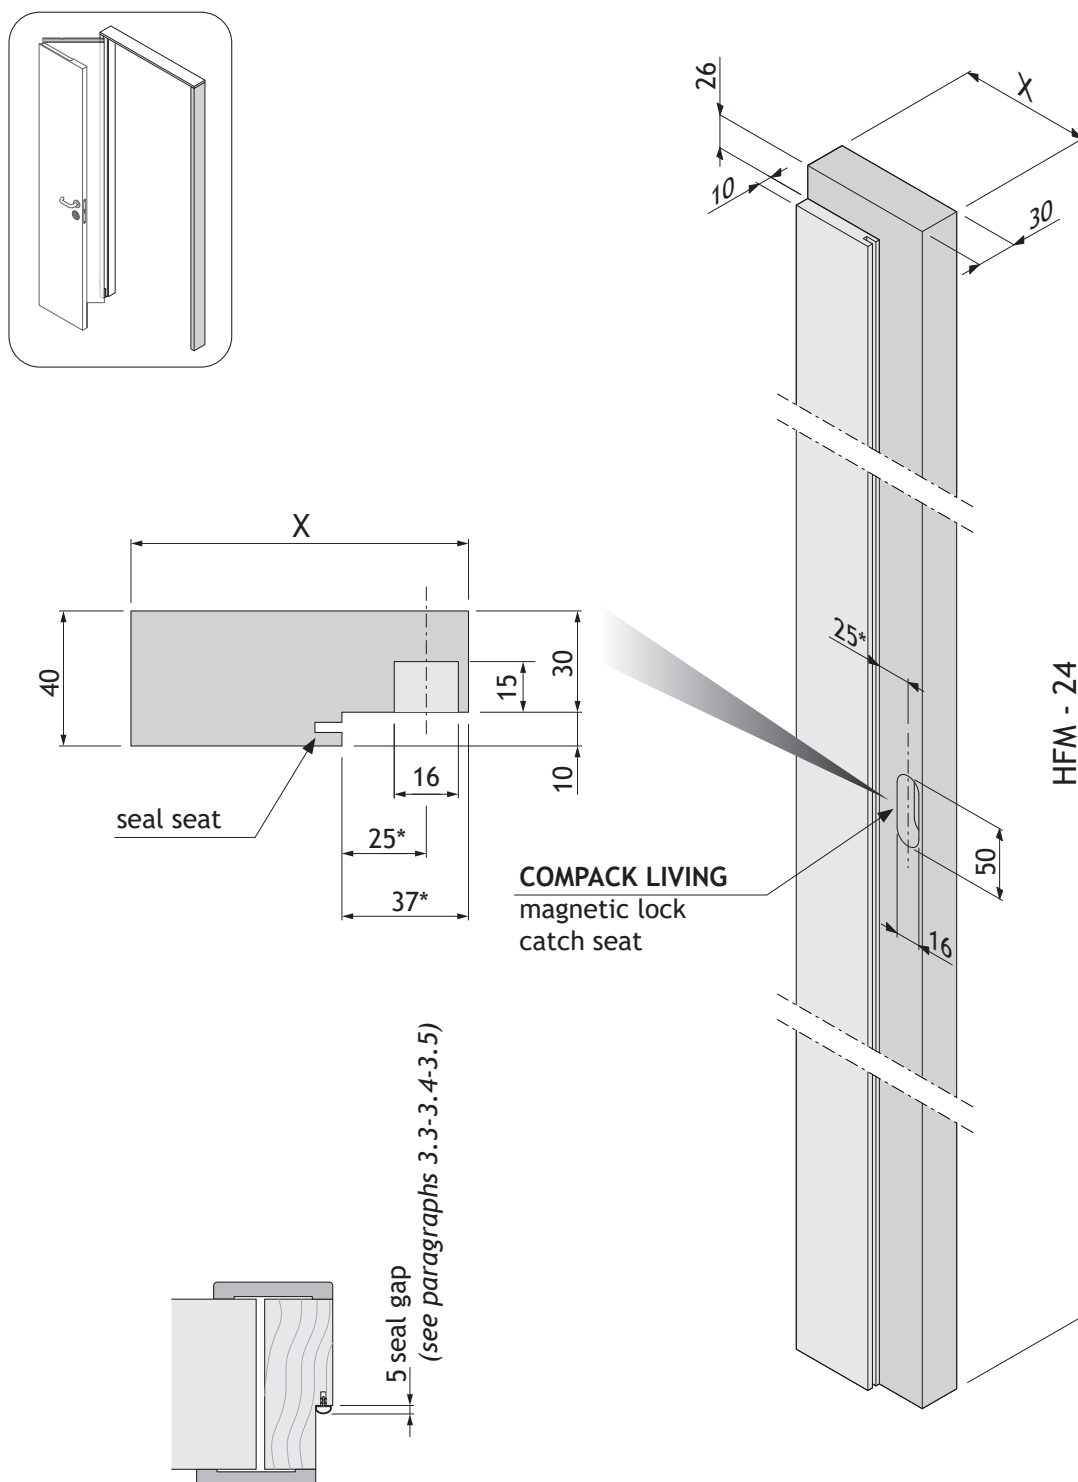

The dimension marked with (*) vary according to the seal gap dimensions.

X = Wall Thickness
HFM = Wall Hole Height


5.9 Upper crossbeam without rabbet profile (compatible with COMPACT LIVING 90°)

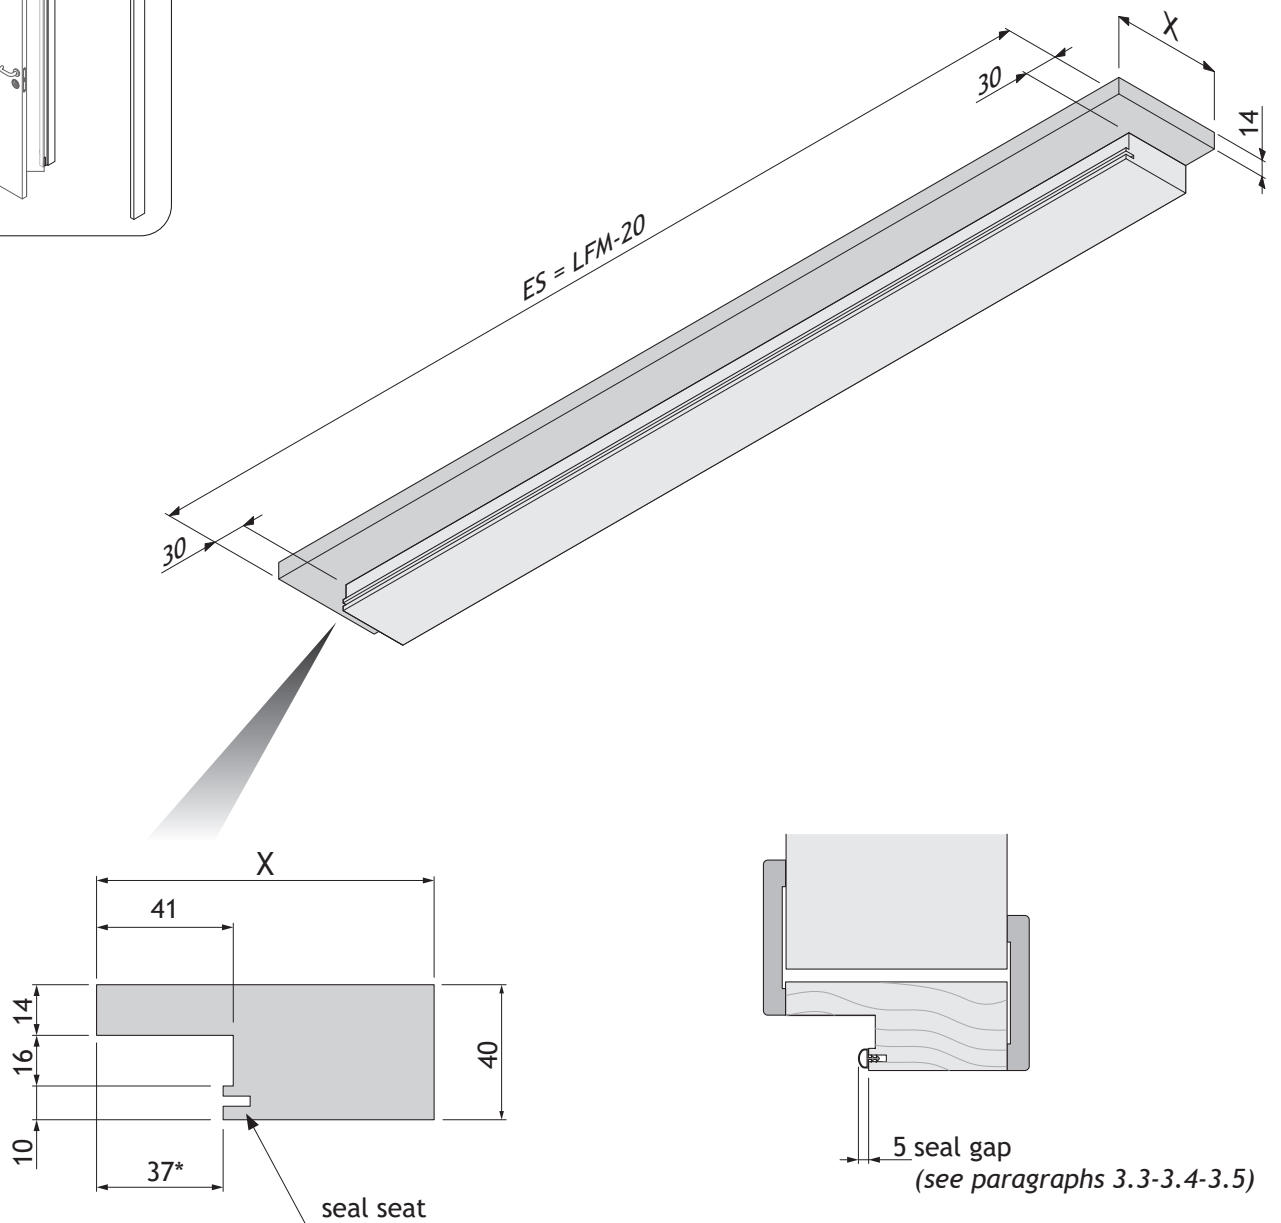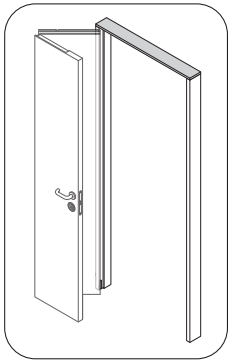

The dimension marked with (*) vary according to the seal gap dimensions.

- X** = Wall Thickness
- ES** = Outer Jamb (= length of the upper crossbeam)
- LFM** = Wall Hole Width



5.10 Upper crossbeam with rabbet profile (compatible with COMPACT LIVING 90°)

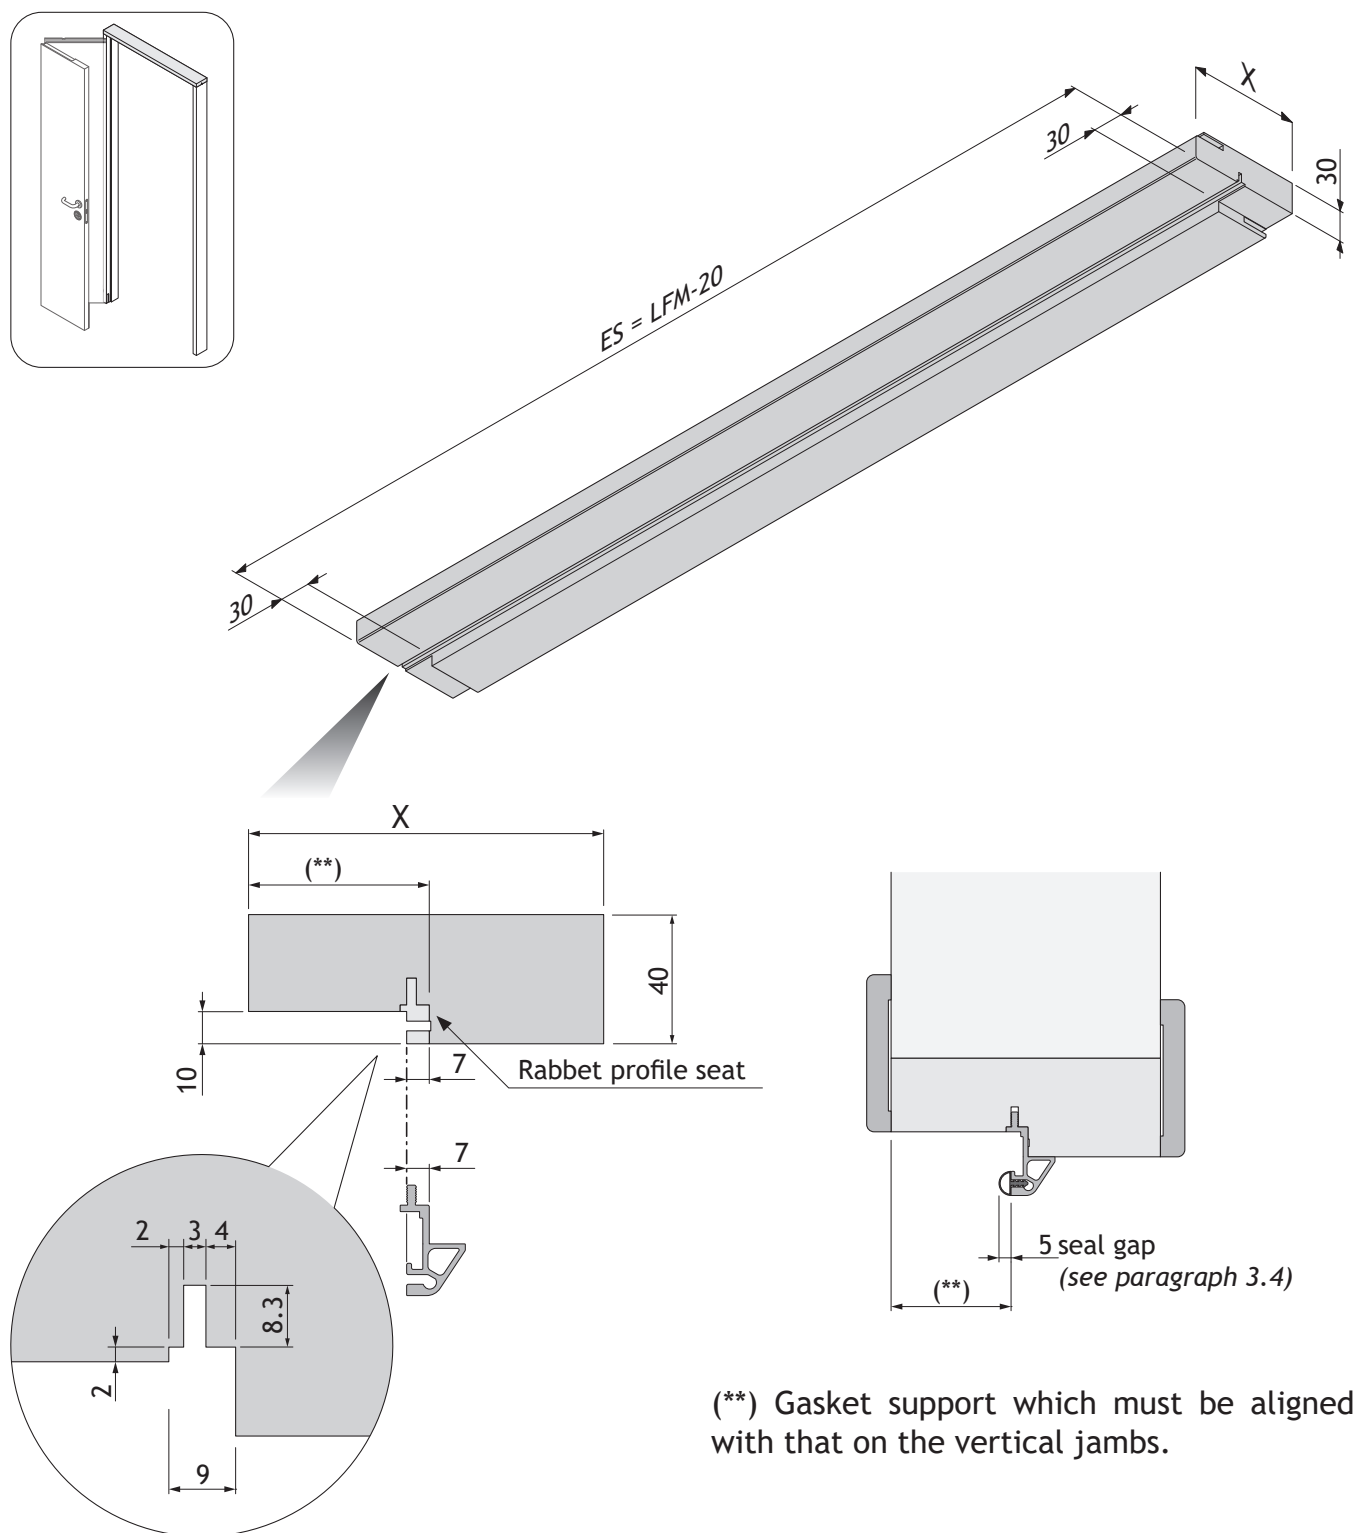


(**) Gasket support which must be aligned with that on the vertical jambs.

- X = Wall Thickness
 ES = Outer Jamb (= length of the upper crossbeam)
 LFM = Wall Hole Width

5.11 Working for the silicone gasket (compatible with COMPACT LIVING 90°)

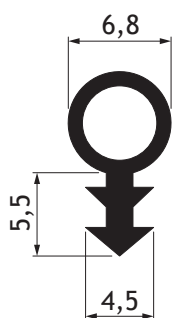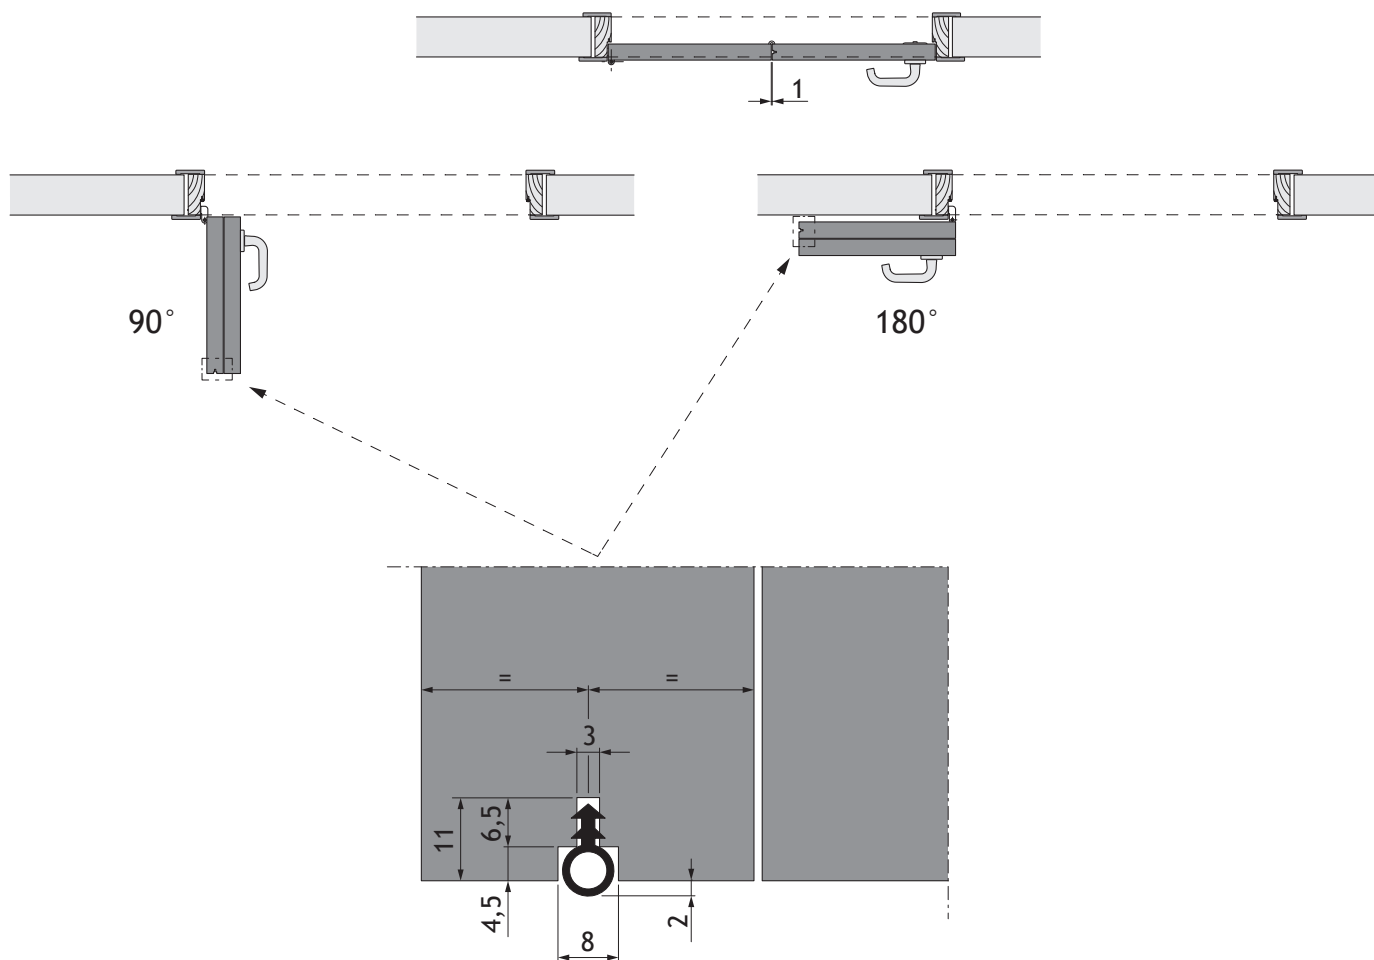


Item code gasket
Roverplastik A 109 S 68
(Optional)

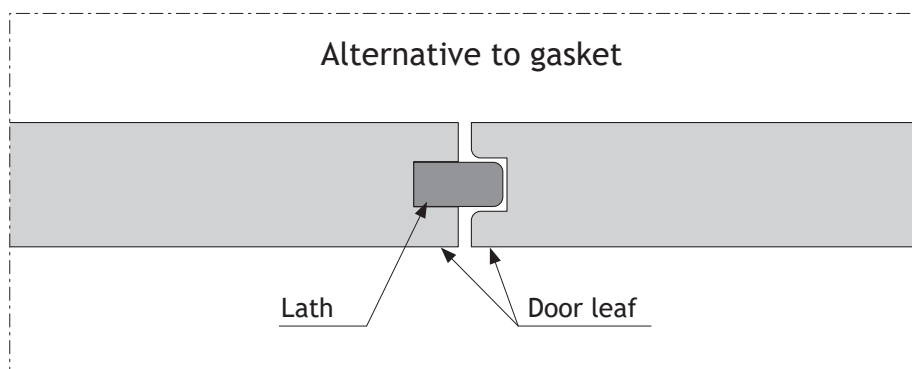


6. ASSEMBLY

6.1 Assembling the hardware on the leaf

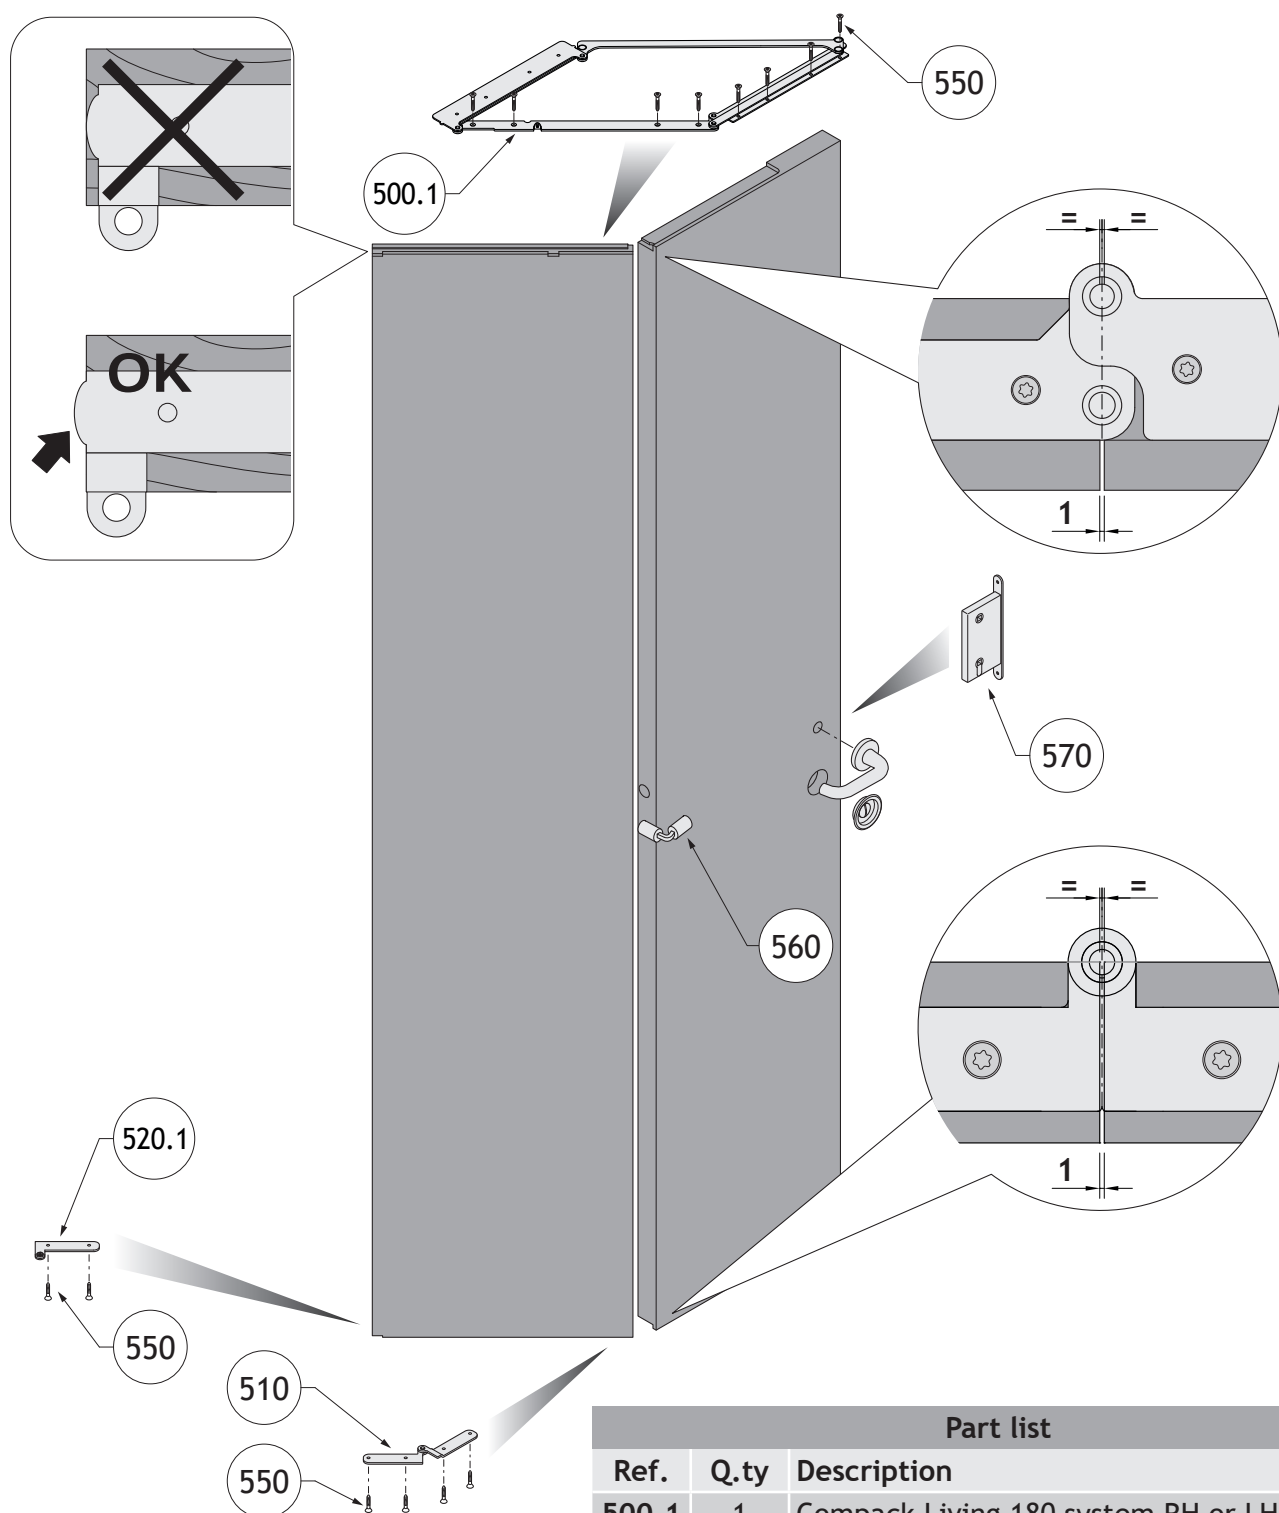


Part list		
Ref.	Q.ty	Description
500.1	1	Compact Living 180 system RH or LH
510	1	Central hinge lower
520.1	1	Lateral hinge lower for leaf RH or LH
550	14	Screw TSP trx ø 4x30
560	1	Invisible hinge for alignment leaf
570	1	Magnetic lock Compact Living with strikers and special square spindle (optional)

6.2 Assembling the hardware on the jamb

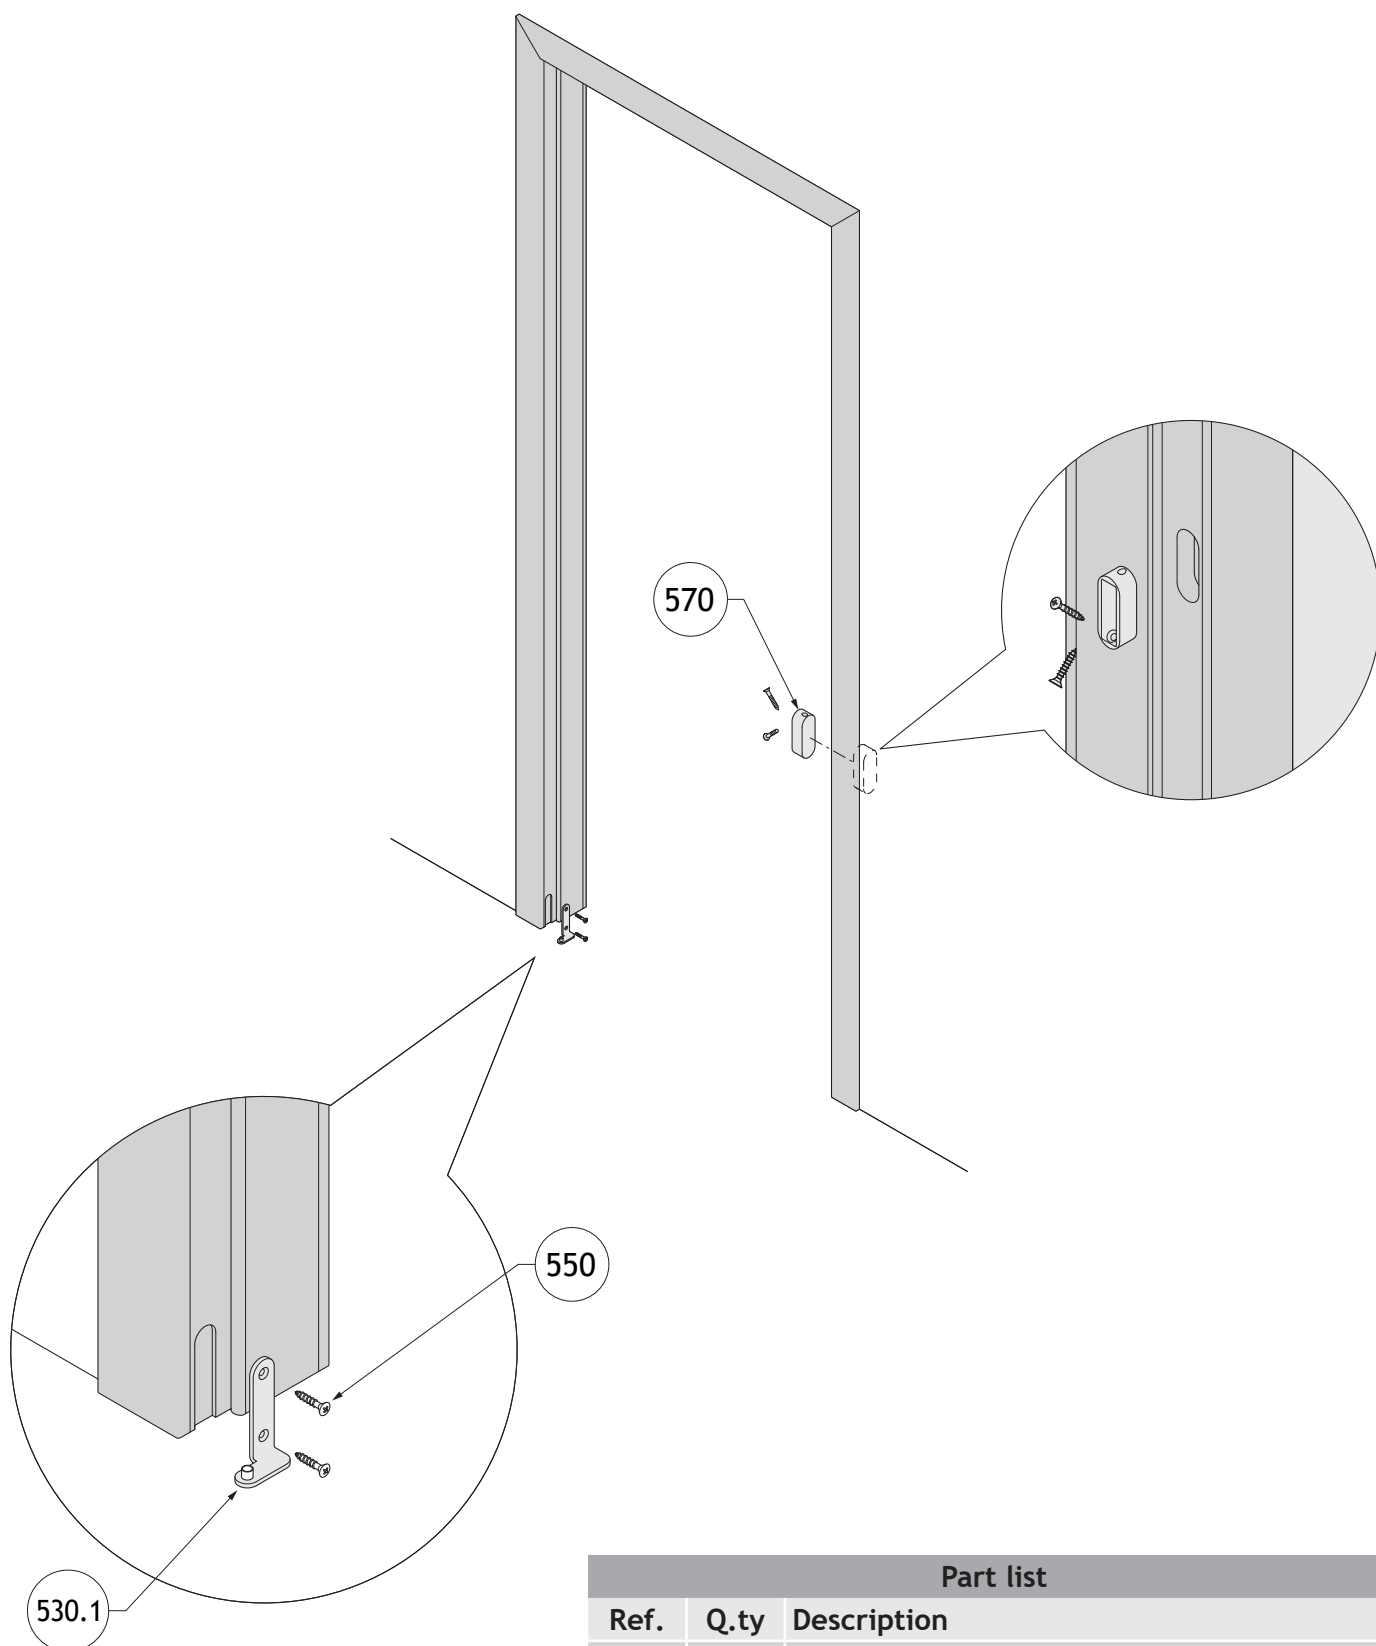

Part list		
Ref.	Q.ty	Description
530.1	1	Lateral hinge lower for jamb RH or LH
550	2	Screw TSP trx ø 4x30
570	1	Magnetic lock Compact Living with strikers (optional)

6.3 Installation door leaf on the jambs

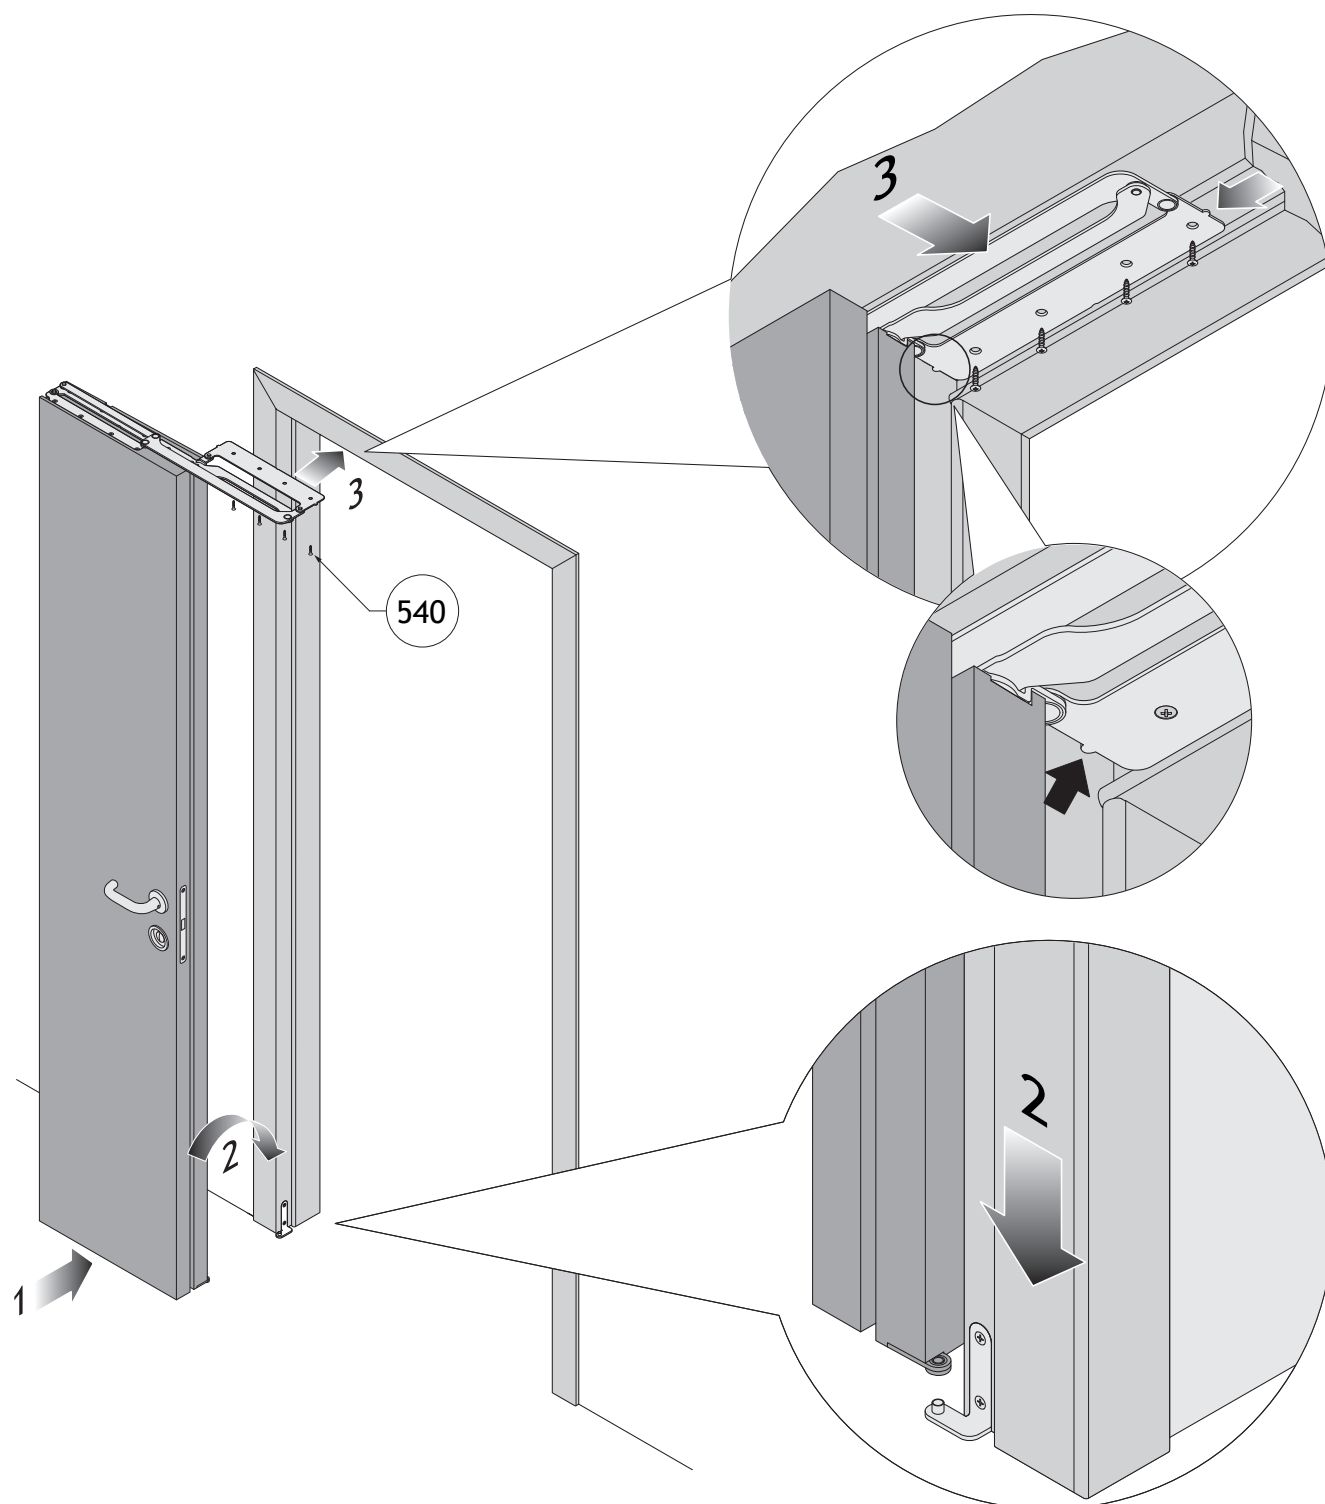

See sequence below for fitting the door:

- 1 fold the door leaves against one another
- 2 mount the door on the pivot of the hinge lower
- 3 position the top hardware pieces in **perfect alignment with the corner** and screw in place (screws included)


Part list		
Ref.	Q.ty	Description
540	4	Screw TSP trx ø 4x22

7. SPECIAL COMPACT LIVING MAGNETIC LATCH

If lever handles cannot be used because of the way the doors fold together, it is necessary to use the special **COMPACT** magnetic latch, which makes it possible to use a recessed handle on the lower section of the latch mechanism to lock the door or to retract the latch. This system provides 180° rotation. The special **COMPACT** magnetic latch also makes it possible to install the recessed handle on the upper section of the latch, to ensure privacy when the door opens into the room.

In the **COMPACT LIVING 180°** system it is possible to use a common lock envisaged for a pair of handles limited to **variant 3** when the protrusion of the handle leaf allows this (*see chapter 3. USE VARIANTS*).


With the **COMPACT** hinge, the recessed handle installed on the lower section of the latch functions as follows:

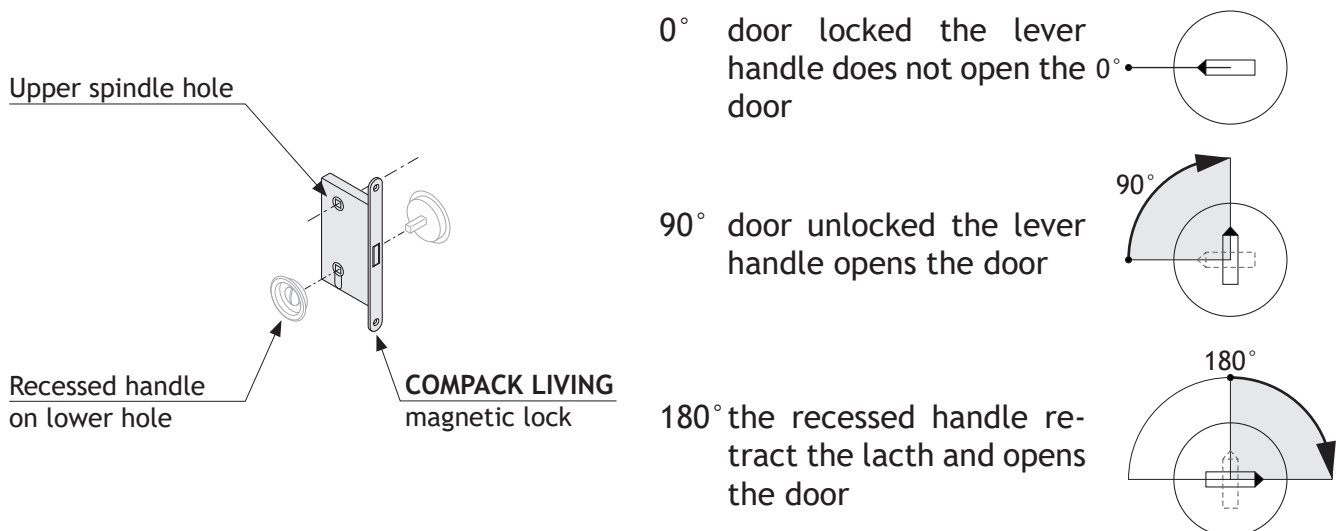


Recessed handle on upper latch section.



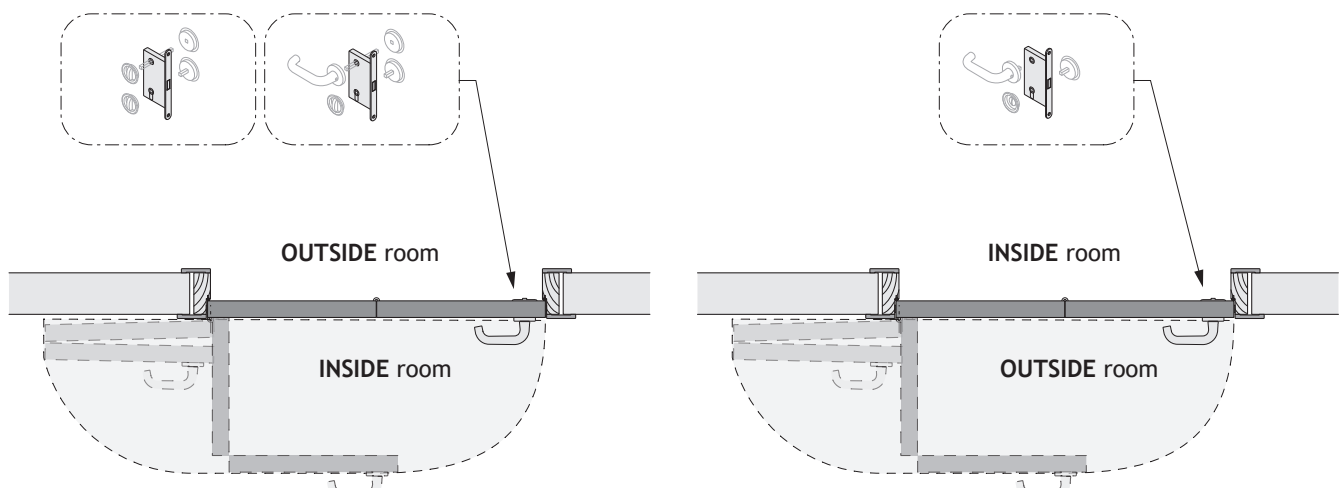


to ensure privacy when the door opens into the room.

To unite the lever handle with the recessed handle, use the special spindle in the latch pack

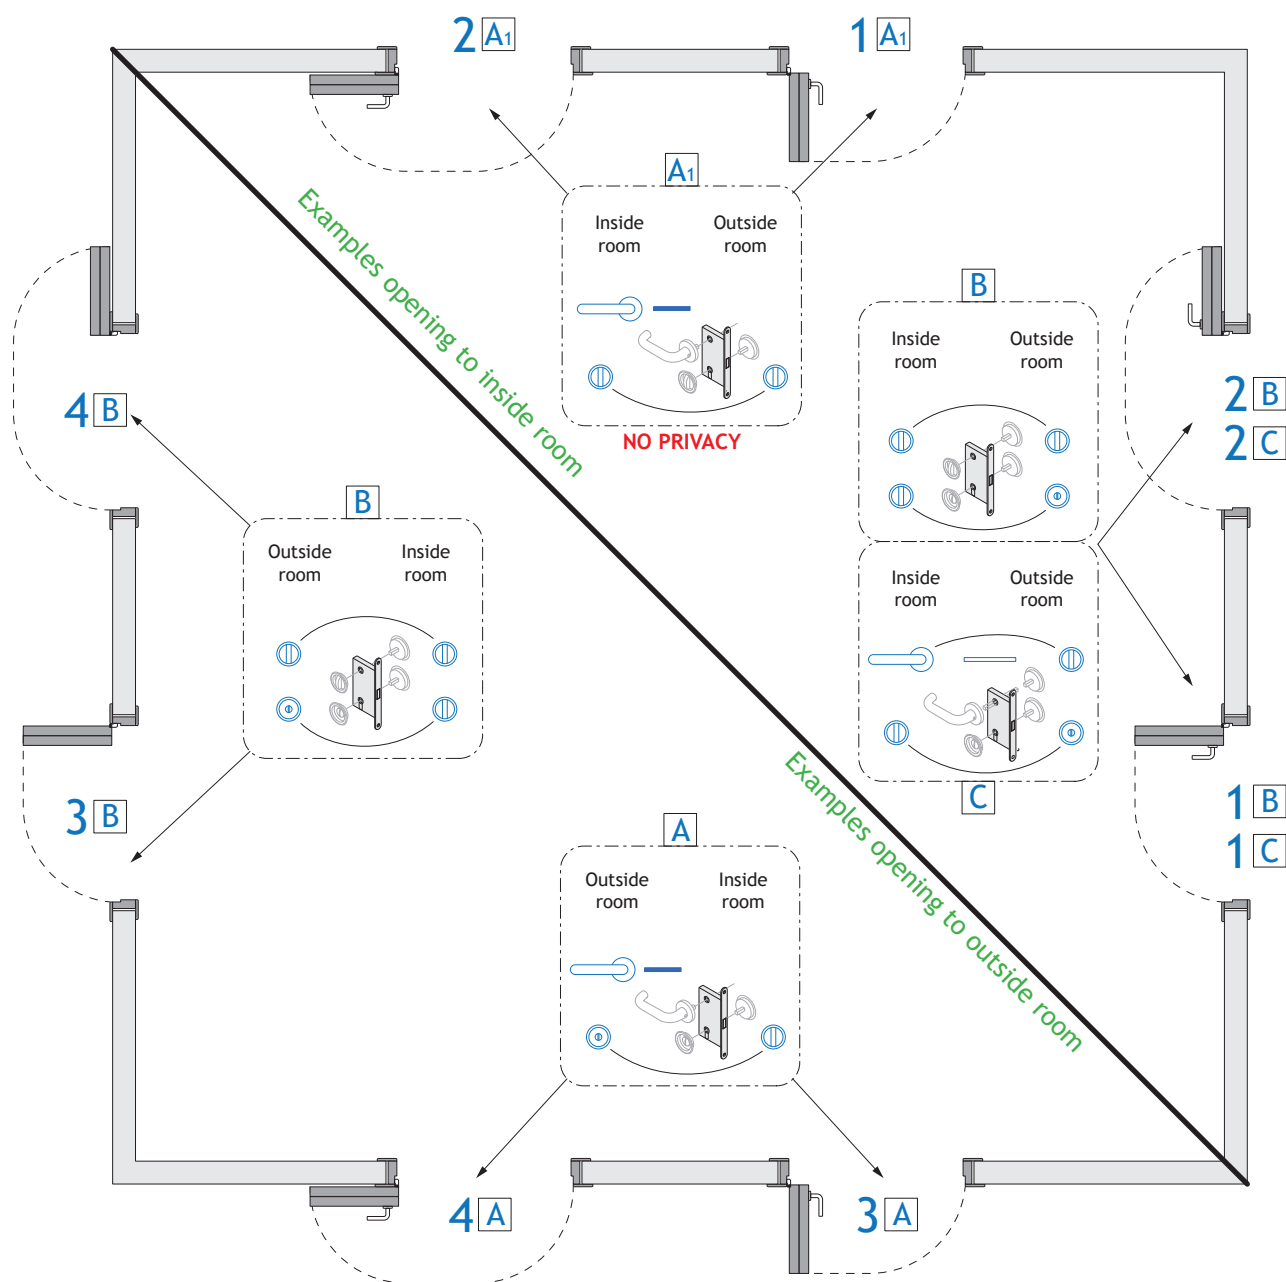

7.1 Examples for using the special COMPACT LIVING lock



-  Traditional lever handle
-  Recessed handle with knob
-  Recessed handle
-  Special spindle square lock **COMPACT** (included in the lock's package)
-  Expansion spindle square (available on the market)

- 1** COMPACT LIVING 90° System opening to inside room
- 2** COMPACT LIVING 180° System opening to inside room
- 3** COMPACT LIVING 90° System opening to outside room
- 4** COMPACT LIVING 180° System opening to outside room

NOTES

[illegible]



COMPACT living® is an idea **CELEGON**
30035 Mirano (Venezia) | Via G. Galilei, 6 - Z.I.
T +39 041 572 8404 | F +39 041 572 8522
www.celegon.it | info@celegon.it